

Vol 3
Volume 3

OPERATION AND MAINTENANCE MANUAL

FOR

CHICO AND MUD CREEKS

AND SANDY GULCH

SACRAMENTO RIVER AND MAJOR AND MINOR

TRIBUTARIES PROJECT, CALIFORNIA



U. S. ARMY ENGINEER DISTRICT

CORPS OF ENGINEERS

SACRAMENTO, CALIFORNIA

U.S. ELEVATIONS BIG CHICO, CR.

② 1500 CFS EL. 191.2 C of E DATUM JUST D.S. OF
WARRIOR ST.

EL. 189.5 C of E DATUM JUST U.S. OF
THE S.P. R.R. BRIDGE

1 2. City shall perform the required maintenance and
2 operation of all that portion of the aforementioned project
3 facilities situate within the boundaries of the corporate limits
4 of the City of Chico.

5 3. Maintenance and operation as used in Paragraph 2
6 hereof, is set forth in "The Operation and Maintenance Manual
7 For Chico and Mud Creeks and Sandy Gulch, Sacramento River and
8 Major and Minor Tributaries Project, California", prepared by
9 U.S. Army Corps of Engineers, Sacramento, California, dated
10 May, 1965.

11 4. Annually, and in the month of February each year,
12 City shall prepare and cause to be submitted to County for
13 approval by County, an estimate cost to City to operate the
14 aforementioned portion of said project in the City of Chico for
15 the ensuing fiscal year.

16 5. City shall keep and maintain an accurate cost record
17 of all materials used, funds expended therefor, and labor
18 employed in the operation and maintenance of the aforementioned
19 portion of said project facilities situate within the City of
20 Chico. Annually, and prior to May 15, City shall file with
21 County an itemized claim for all money as provided for within
22 said budget that has been expended in the maintenance and oper-
23 ation of the aforementioned portion of said project during the
24 past fiscal period. County shall forthwith thereafter pay said
25 claim as reimbursement to City for its services under the terms
26 of this agreement.

27 6. (a) City agrees to indemnify and hold County
28 harmless against all claims for damages arising out of or in
29 anywise connected with City's operation and maintenance of said
30 facilities as hereinabove limited and defined. This obligation
31 upon the part of City shall not be deemed to extend to or include
32 any claim arising from or attributable to the facilities as

1 constructed and installed. Further, this covenant shall not be
2 deemed to include or extend to any event, happening or occurrence
3 arising outside of or beyond the boundaries of the City of Chico,
4 not occasioned by the active negligence of City.

5 (b) County hereby agrees to indemnify and hold City
6 harmless with respect to any claims arising out of or occurring
7 upon any portion of the project except as provided in (a),
8 situate outside of the boundaries of the City of Chico, other than
9 those occasioned by active negligence of City, and further with
10 respect to any claims arising out of any indemnifying agreements
11 which County may heretofore have given, or may hereafter give, to
12 any other person or agency, public or private.

13 7. In the event City desires to do any work or improvement
14 on said project under their jurisdiction in excess of the budget
15 provisions or outside of the operation and maintenance described
16 in paragraph 3 and charge the County therefor, prior approval
17 shall be obtained from the County, except and provided that prior
18 approval shall not be required in the case of an emergency where
19 work, repair or improvement is required to protect persons or
20 property. The existence of an emergency shall be determined by
21 City.

22 8. This agreement may be terminated by either party as of
23 June 30th of any fiscal year by giving six months prior notice in
24 writing to the other party. In the absence of such notice, this
25 agreement shall continue from year to year.

26 Executed in duplicate the day and year first hereinabove
27 written.

28
29 Approved as to budget
and fiscal

30 J. H. Salby Jr.

31 Approved as to form:

32 [Signature]
County Counsel


[Signature]
City Attorney

[Signature]
COUNTY OF BUTTE

CITY OF CHICO, A Municipal
Corporation,

By [Signature]
City Manager

Authorized pursuant to
Resolution No. 106-65-66
Adopted 12-21-65

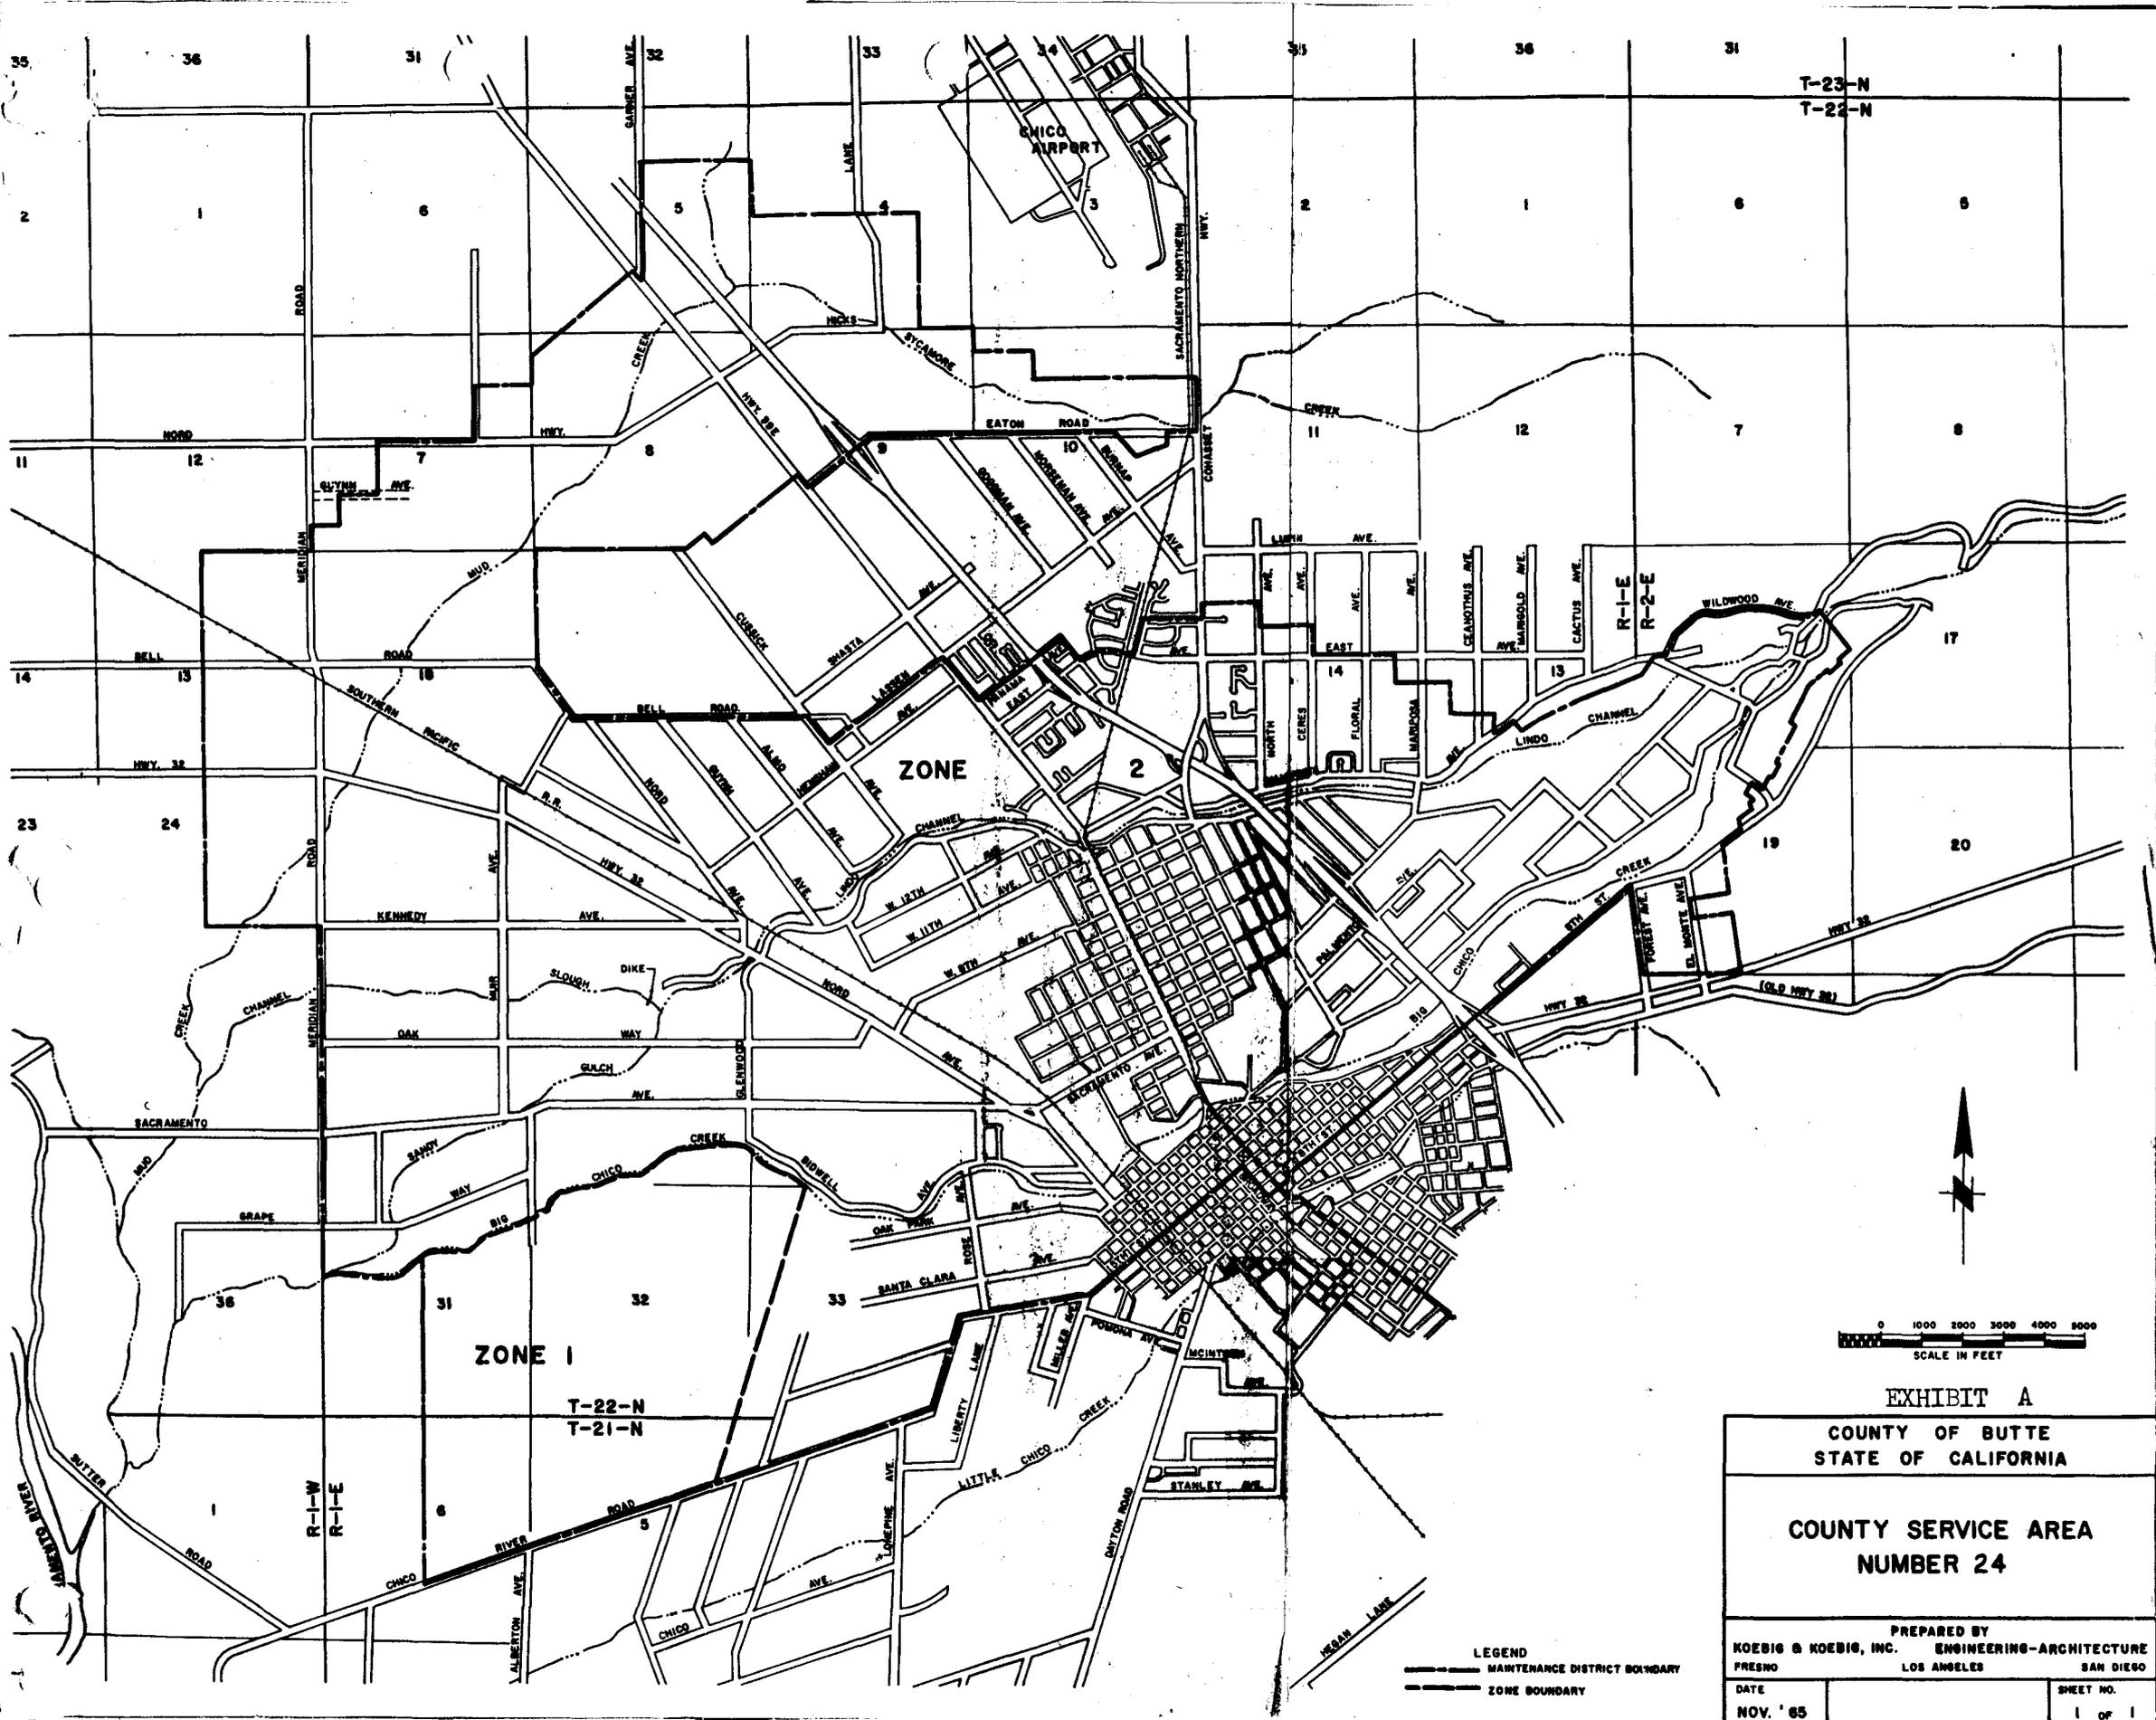

T-23-N
T-22-N

ZONE 1

T-22-N
T-21-N

ZONE 2

LEGEND
 - - - - - MAINTENANCE DISTRICT BOUNDARY
 - - - - - ZONE BOUNDARY




EXHIBIT A

COUNTY OF BUTTE
STATE OF CALIFORNIA

**COUNTY SERVICE AREA
NUMBER 24**

PREPARED BY
KOEBIG & KOEBIG, INC. ENGINEERING-ARCHITECTURE
FRESNO LOS ANGELES SAN DIEGO

DATE NOV. '65	SHEET NO. 1 OF 1
------------------	---------------------

OPERATION AND MAINTENANCE MANUAL

**CHICO AND MUD CREEKS
AND SANDY GULCH**

**SACRAMENTO RIVER AND MAJOR AND MINOR
TRIBUTARIES PROJECT, CALIFORNIA**

LOCATION	ADDITION OR REVISION	DATE
Exhibit F	Add copy of letter of transfer dated 27 Nov 1962	2 Feb 2011
Exhibit F	Add copy of letter of transfer dated 18 Nov 1964	2 Feb 2011
Exhibit F	Add copy of letter of transfer dated 18 Dec 1964	2 Feb 2011
Exhibit F	Add copy of letter of transfer dated 30 Nov 1965	2 Feb 2011
Exhibit F	Add copy of letter of transfer dated 21 Feb 1966	2 Feb 2011

CORPS OF ENGINEERS
U. S. ARMY

OPERATION AND MAINTENANCE MANUAL
FOR
CHICO AND MUD CREEKS
AND SANDY GULCH
SACRAMENTO RIVER AND MAJOR AND MINOR TRIBUTARIES
PROJECT, CALIFORNIA

U. S. Army Engineer District
Corps of Engineers
Sacramento, Calif.

May 1965

TABLE OF CONTENTS

<u>Paragraph</u>	<u>Subject</u>	<u>Page</u>
<u>SECTION I - INTRODUCTION</u>		
1-01	Authorization.	1
1-02	Location	1
1-03	Description of the Project Works	2
1-04	Protection Provided.	2
1-05	Construction Data and Contractor	3
1-06	Flood Flows.	3
<u>SECTION II - LOCAL COOPERATION REQUIREMENTS</u>		
2-01	Requirements of Local Cooperation.	4
2-02	Assurances Provided by Local Interests	4
2-03	Acceptance by the State Reclamation Board.	4
<u>SECTION III - MAINTENANCE AND OPERATION - GENERAL PROCEDURE</u>		
3-01	Reference to Approved Regulations.	5
3-02	Intent of Regulations.	5
3-03	Purpose of this Manual	5
3-04	Definitions.	6
3-05	General Provisions of Regulations.	6
3-06	Assistance to be Furnished by the District Engineer.	8
3-07	Responsibilities of the Superintendent	8
3-08	Inspection Procedure	13
<u>SECTION IV - FEATURES OF THE PROJECT</u> <u>SUBJECT TO FLOOD CONTROL REGULATIONS</u>		
4-01	Project Works.	15
4-02	Levees	15
4-03	Channels and Floodways	19
4-04	Drainage and Irrigation Structures	25
4-05	Miscellaneous Facilities	29
<u>SECTION V - SUGGESTED METHODS OF COMBATING FLOOD CONDITIONS</u>		
5-01	Methods Suggested.	33
5-02	Earthen Levees	33
5-03	Premeditated Damage.	33
5-04	Security	33
5-05	Inspection of Flood Control Works.	34
5-06	Preliminary Repair Work.	34
5-07	Disaster Relief.	35

TABLE OF CONTENTS (CONT'D)

<u>Paragraph</u>	<u>Subject</u>	<u>Page</u>
5-08	Flood Fight.	35
5-09	Topping.	37
5-10	Transportation	38
5-11	Use of Government Plant.	38

EXHIBITS

A	Federal Flood Control Regulations. . .	Sheets 1 & 2
A-1	Location Map	1 Sheet
B	"As-Constructed" Drawings.	Detached
C	Plates of Suggested Flood Fighting Methods.	Plates 1 thru 10
D	Suggested Semi-Annual Report Form. . .	Sheets 1 & 2
E	Suggested Check Lists of Levees, Channels and Structures.	Sheets 1 thru 10
F	Letter of Acceptance by the State Reclamation Board.	1 Sheet
G	Sample Permit for Use of Right-of-Entry	Sheets 1 thru 3

OPERATION AND MAINTENANCE MANUAL
FOR CHICO AND MUD CREEKS AND SANDY GULCH
SACRAMENTO RIVER AND MAJOR AND MINOR
TRIBUTARIES PROJECT, CALIFORNIA

SECTION I

INTRODUCTION

1-01. Authorization. The Chico and Mud Creeks and Sandy Gulch Channel Improvement and Levee Construction unit of work was authorized as a part of the Sacramento River and Major and Minor Tributaries Project, California, by the Flood Control Act of 22 December 1944, Public Law 534, Seventy-eighth Congress, Second Session, Section 10 which reads in part as follows:

"Sacramento-San Joaquin River Basin - Sacramento River - the projects for the control of floods and other purposes on the Sacramento River, California, adopted by the Acts approved March 1, 1917, May 15, 1928, August 26, 1937, and August 18, 1941, are hereby modified substantially in accordance with the recommendations of the Chief of Engineers in House Document numbered 649, Seventy-eighth Congress, Second Session"

The Chico and Mud Creeks and Sandy Gulch unit of work is one of the proposed improvements included in item (c), paragraph 6, of the Chief of Engineers' recommendation to the Secretary of the Army in House Document No. 649.

Authorizing legislation by the State of California is contained in Section 12648 of the State Water Code and was enacted in Section 31, Chapter 1514, California Statutes of 1945.

1-02. Location. The Chico and Mud Creeks and Sandy Gulch unit of work is located in the Sacramento River Valley in the vicinity of the City of Chico, Butte County, California. The work begins near the mouth of Chico Creek easterly of the Sacramento River and continues up Chico Creek (Big Chico Creek) to the mouth of Mud Creek; from the mouth of Mud Creek at its confluence with Chico Creek to high ground; from the mouth of Sycamore Creek at its confluence with Mud Creek to the diversion channel at its confluence with South Sycamore Creek to the diversion structures on Sandy Gulch (Lindo Channel) and Chico Creek about a mile upstream to high ground. The project location is indicated on the vicinity map of EXHIBIT A-1.

1-03. Description of the Project Works. The project works covered by this manual include the following:

a. The cleared channel and levees of Big Chico Creek upstream to Mud Creek; the enlarged channel and levees of Mud Creek upstream to near Hicks Lane; the channel and levees of Sycamore upstream to the Diversion Channel; and the Diversion Channel from Sycamore Creek to Big Chico Creek. The work also includes channel improvement and levee construction on the lower reaches of Sycamore Creek, Sheep Hollow, Dry Creek, North Sycamore Creek and on the lower end of Channel Slough.

b. The Big Chico Creek culvert and the weir and Lindo Channel culvert at the upper end of the project works.

c. The unimproved channels of Big Chico Creek and Lindo Channel that lie between the diversion structures at the upper end of the project and the Sacramento River.

d. Intermittent irrigation and drainage structures and intermittent bank protection along the above described reaches of stream-bed.

1-04. Protection Provided. The project provides flood protection from flood flows in Big Chico Creek, Sandy Gulch, Sycamore Creek and Mud Creek to the City of Chico and suburban area with related residential and commercial buildings and manufacturing plants; to about 14,000 acres of well-developed urban and rural lands; to scattered farm buildings; to the Southern Pacific Railroad and the Sacramento Northern Railway; to U. S. Highway 99E and State Highway 32; and to additional city and county streets and roads. The project design flow for the various streams involved are as follows:

<u>Stream</u>	<u>Cubic Feet Per Second</u>
Big Chico Creek (upper)	16,000
Diversion Channel	8,500
South Sycamore Creek	8,800
Sycamore Creek (Sta 365+39 - 447+50)	11,000
Sycamore Creek (Sta 449+79 - 499+65)	10,000
Mud Creek (Sta 222+90 - 361+25)	15,000
Mud Creek (Sta 206+02 - 222+90)	13,000 Channel
	15,000 Levees
Mud Creek (Sta 9+56 - 206+02)	13,000
Big Chico Creek (lower)	15,000
Lindo Channel. <i>8.5. 14.5. 14.5. 14.5</i>	14,500
Mud Creek (extended)	5,500
Sheep Hollow	1,400
Dry Creek	500
North Sycamore Creek	1,800
Big Chico Creek-Unimproved (Mud Creek to Diversion Works)	1,500
Sandy Gulch - Unimproved (Lindo Channel)	6,000

For the project design levee grade at least 3 feet of freeboard has been provided over the project design flood plane. The grade of the adopted flood plane profile varies from elevation 137.0 feet at the lower end to elevation 280.6 at the upper end of the project. All elevations are referred to U. S. Corps of Engineers datum. ✓

1-05. Construction Data and Contractor. Construction required by the Corps of Engineers to bring levees of the Chico, Mud and Sandy Gulch works to project standards and to improve the channels was accomplished under the following contracts:

a. Channel improvement and levee construction from the Sacramento River to Sacramento Avenue was accomplished under Contract No. DA-04-167-CIVENG-62-64 by H. Earl Parker, Inc. during the period from 11 June 1962 to 26 November 1962. Specification No. 2742, Drawing No. 50-4-3684. 165,504.

b. Channel improvement and levee construction from Sacramento Avenue to High Ground has accomplished under Contract No. DA-04-167-CIVENG-64-6 by Geo. W. Brewster & Son, Inc. during the period from 26 July 1963 to 5 January 1965. Specification No. 2882, Drawing No. 50-4-3685. 588,753.

1-05.

c. Modifications to the Chico and Mud Creeks and Sandy Gulch Flood Control Project were accomplished under Contract No. DA-04-167-CIVENG-66-37 by A. Teichert & Son, Inc. during the period from 13 September 1965 to 14 February 1966. Specification No. 3250A, Drawing No. 50-4-4085. 131,900.

Revised paragraph

1-06. Flood Flows. For purposes of this manual, the term "Flood" or "High Water Period" for Big Chico and Mud Creeks and Sandy Gulch within this project shall refer to flows when the water level reaches or exceeds a reading of 12.0 (assumed datum or approximately 6,000 c.f.s.) on the U. S. Geological Survey gage on the right bank of Big Chico Creek 1.8 miles upstream from the golf clubhouse in Bidwell Park; or 10.0 on the State Department of Water Resources gage above the Mud Creek Diversion Structure (gage zero = 259.9 CofE datum); or 15.0 on the State Department of Water Resources gage on the left bank of Mud Creek 400 feet downstream from the new Highway 99E Bridge (gage zero = 161.6 CofE datum).

SECTION II

LOCAL COOPERATION REQUIREMENTS

2-01. Requirements of Local Cooperation. House Document No. 649, Seventy-eighth Congress, Second Session, requires local interests to (a) provide without cost to the United States all lands, easements, and rights-of-way necessary for the construction of the levees and channel improvements; (b) hold and save the United States free from damages due to construction of the levees and channel improvements; and (c) maintain and operate all levees and channel improvements after completion in accordance with regulations prescribed by the Secretary of the Army. The State of California by legislation amended in 1955 agreed to furnish the required cooperation.

2-02. Assurances Provided by Local Interests. Section 12657 of the State Water Code states:

"12657. Except as otherwise provided in Chapters 1 and 2 of this part, the Reclamation Board shall give assurances satisfactory to the Secretary of War (now Secretary of the Army) that local cooperation required by Section 3 of the Act of Congress approved December 22, 1944 (Public Law, numbered 534, Seventy-eighth Congress, Second Session), and Section 2 of the Act of Congress approved August 18, 1941, (Public Law number 228, Seventy-eighth Congress, First Session), will be furnished by the State in connection with the flood control projects authorized and adopted in Sections 12648, 12650, 12651, 12652, 12654 and 12656.2 and on any flood control projects on any stream flowing into or in the Sacramento Valley or the San Joaquin Valley hereafter approved and authorized by Congress."

2-03. Acceptance by the State Reclamation Board. Responsibility for operating and maintaining the lower part of the levees and channels of the Chico and Mud Creeks and Sandy Gulch project was accepted by the Reclamation Board of the State of California by letter dated 21 December 1962. The remaining portion of the Project for channel improvement, levee construction and rock revetment on Mud Creek, Mud Creek extended, Sycamore Creek, Dry Creek, North Sycamore Creek, Sheep Hollow, Diversion Channel, Big Chico Creek, Lindo Channel, Big Chico Discharge Channel and the Channel Slough Plug on the right bank of Lindo Channel was accepted by the Reclamation Board of the State of California by letter dated 22 April 1965, see EXHIBIT F.

2-03. (added)

Responsibility for operating and maintaining Phase I and Phase II of Project Modification of Chico and Mud Creeks and Sandy Gulch Flood Control Project was accepted by the Reclamation Board of the State of California by letters dated 12 January 1966 and 4 March 1966.

SECTION III

MAINTENANCE AND OPERATION - GENERAL PROCEDURE

3-01. Reference to Approved Regulations. This manual is submitted in accordance with provisions of Title 33 - Navigation and Navigable Waters, Chapter II, Corps of Engineers, Department of the Army, Part 208 - Flood Control Regulations, Maintenance and Operation of Flood Control Works, as of 1 January 1962, a copy of which is included as Exhibit A, Sheets 1 and 2.

3-02. Intent of Regulations. The general intent of the regulations approved by the Secretary of the Army is stated in paragraph 208.10(a)(1) as follows: "The structures and facilities constructed by the United States for local flood protection shall be continuously maintained in such a manner and operated at such times and for such periods as may be necessary to obtain the maximum benefits."

The principle mission of the Corps of Engineers, during flood emergencies, is to insure that flood control works are properly operated and maintained and offer technical advice to enable local interests to obtain maximum flood protection. All other matters become secondary and will yield precedence to the accomplishment of the above-stated missions. During flood periods local interests maintain close liaison with the office of the District Engineer, Corps of Engineers. However, in the event it is evident that all available county and local resources are insufficient to cope with the situation and the necessity for an emergency proclamation is anticipated, requests for State assistance in flood fighting should properly be made direct to the Department of Water Resources, which is the state agency designated by the Director of Public Works, to receive requests from local agencies for assistance in flood fighting. This agency is authorized to request Federal assistance from the Corps of Engineers when State and local resources are insufficient to cope with the situation. Therefore, it is desired to emphasize that requests for Federal assistance in flood fighting should be made only when it is evident that County, State and/or other local equipment and manpower will be exhausted and local resources are insufficient to cope with the flood emergency situation.

3-03. Purpose of this Manual. In view of the large number of local flood protection projects authorized by Congress and the repetitious nature of regulations to govern maintenance and operation of each individual project, and in order that local interests may be fully aware of the extent of the obligations assumed by them in furnishing assurances of local cooperation for projects to be constructed in the future, the general regulations described above were established by the Secretary

of the Army. The general regulations approved by the Secretary of the Army, August 1944, were intended to be sufficiently broad in scope and general in nature as to be applicable to all flood protection projects for which such regulations are required by law. Section 208.10(a)(10) of the regulations read as follows: "The Department of the Army will furnish local interests with an Operation and Maintenance Manual for each completed project, or separate useful part thereof, to assist them in carrying out their obligations under this part." This manual has, therefore, been prepared to furnish local interests with information on the project works and advice as to the details of the operation and maintenance requirements applicable to this particular project, to state procedure required by the Department of the Army, and to indicate satisfactory methods of flood-fighting operations and emergency repairs. The project works are to be maintained and operated in accordance with the Flood Control Regulations referred to above and interpretations thereof contained herein.

3-04. Definitions. As used hereinafter, the term "Superintendent" shall be defined to mean the person appointed by the local agency to be directly in charge of an organization which will be fully responsible for the continuous operation and inspection of the project works; the term "District Engineer" shall be defined to mean the District Engineer of the U. S. Army Engineer District, Sacramento, or his authorized representative. The term "flood" or "high water period" shall mean any flow in Big Chico Creek when the water surface reaches or exceeds a reading of 12.0 on the U.S. Geological Survey gage on the right bank of Big Chico Creek 1.8 miles upstream from the golf clubhouse in Bidwell Park; or 10.0 on the State Department of Water Resources gage on the left bank of the Diversion Channel 170 feet downstream from the Longfellow Avenue Bridge; or 15.0 on the State Department of Water Resources gage on the left bank of Mud Creek 400 feet downstream from the new Highway 99E bridge. The term "right bank" or "left bank" shall be defined to mean the right or left bank or side, respectively, of a stream or channel when facing downstream.

3-05. General Provisions of Regulation. In addition to that quoted in paragraph 3-02 above, the general provisions of the Flood Control Regulations, contained in paragraphs 208.10(a)(2), to 208.10(a)(9), both inclusive, are quoted as follows:

- (2) The State, political subdivision thereof, or other responsible local agency, which furnished assurance that it will maintain and operate flood control works in accordance with regulations prescribed by the Secretary of the Army, as required by law, shall appoint a permanent committee consisting of, or headed by an official hereinafter called the "Superintendent," who shall be responsible for the development and maintenance of, and directly in charge of an organization responsible for

the efficient operation and maintenance of all structures and facilities during flood periods and for continuous inspection and maintenance of the project works during periods of low water, all without cost to the United States.

- (3) A reserve supply of materials needed during a flood emergency shall be kept on hand at all times.
- (4) No encroachment or trespass which will adversely affect the efficient operation or maintenance of the project works shall be permitted upon the rights-of-way for the protective facilities.
- (5) No improvement shall be passed over, under or through the walls, levees, improved channels or floodways, nor shall any excavation or construction be permitted within the limits of the project right-of-way, nor shall any change be made in any features of the works without prior determination by the District Engineer of the Department of the Army or his authorized representative that such improvements, excavation, construction, or alteration will not adversely affect the functioning of the protective facilities. Such improvements or alterations as may be found to be desirable shall be constructed in accordance with standard engineering practice. Advice regarding the effect of proposed improvements or alterations on the functioning of the project and information concerning methods of construction acceptable under standard engineering practice shall be obtained from the District Engineer, or, if otherwise obtained, shall be submitted for his approval. Drawings or prints showing such improvements or alterations as finally constructed shall be furnished the District Engineer after completion of the works.
- (6) It shall be the duty of the Superintendent to submit a semi-annual report to the District Engineer covering inspection, maintenance, and operation of the protective works. (This will be accomplished by the State Department of Water Resources - see paragraph 3-08 of this manual.)
- (7) The District Engineer or his authorized representative shall have access at all times to all portions of the protective works.

- (8) Maintenance measures or repairs which the District Engineer deems necessary, shall be promptly taken or made.
- (9) Appropriate measures shall be taken by local authorities to insure that the activities of all local organizations operating public or private facilities connected with the protective works are coordinated with those of the Superintendent's organization during flood periods."

3-06. Assistance to be Furnished by the District Engineer. The District Engineer will:

- a. Furnish to the State Reclamation Board "As Constructed" drawings of the project works at the time they are transferred.
- b. Make periodic inspections of the project works and notify the State Reclamation Board of any repairs or maintenance measures which the District Engineer deems necessary in addition to measures taken by the Superintendent.
- c. Submit to the Office, Chief of Engineers, all cases of noncompliance with full details thereof for determination of corrective measures to be taken.
- d. Make prior determination that any proposed encroachment, improvement, excavation, or construction within the right-of-way, or alteration of the project works, will not adversely affect the functioning of the protective facilities. (This procedure will be handled by the State Reclamation Board under its permit procedure and authority.)
- e. Assist local interests as may be practicable, in their duties of ascertaining storm developments having flood-producing potentialities, assembling flood-fighting forces and materials, and initiating and carrying out flood-fighting operations.

3-07. Responsibilities of the Superintendent. In line with the provisions of the Flood Control Regulations, the general duties of the Superintendent include the following:

- a. Training of Key Personnel. Key personnel shall be trained in order that regular maintenance work may be performed efficiently and to insure that unexpected problems related to flood control may be handled in an expeditious and orderly manner. The Superintendent should have available the names, addresses, and telephone numbers of all his key men and a reasonable number of substitutes. These key men should, in turn, have similar data on all of the men who will assist them in the discharge of their duties. The organization of key men should include the following:

- (1) An assistant to act in the place of the Superintendent in case of his absence or indisposition.
- (2) Sector foremen in sufficient number to lead maintenance patrol work of the levee, inspect the channel, and operate the gate structures properly during flood periods. High qualities of leadership and responsibility are necessary for these positions.

b. Files and Records. The Superintendent shall maintain a file of reports, records, and drawings concerning the project works, readily available at all times to the District Engineer.

c. Encroachment or Trespass on Right-of-Way. In accordance with the provisions of Flood Control Regulations 208.10(a)(4), no encroachment or trespass which will adversely affect the efficient operation or maintenance of the project works shall be permitted on the rights-of-way for the protective facilities. The Superintendent will, therefore, cause notices to be posted at conspicuous places along the project right-of-way directing public attention to this regulation. The Superintendent shall report to the State Reclamation Board any offenders and the Board will take whatever action is necessary under local ordinances and under its own authority to remove the encroachment or to prosecute the trespassers.

d. Permits for Right-of-Entry or Use of Portion of Right-of-Way. Permits for temporary right-of-entry or use of portion of the right-of-way shall not be issued without prior determination by the State Reclamation Board sufficiently in advance of issuance to permit adequate study and consideration and determination of conditions to be embodied in the permit document.

e. Permits for Improvements of Construction within the Project Right-of-Way. All requests for permits for construction of any improvements of any nature within the limits of the project right-of-way shall be referred to the District Engineer through the State Reclamation Board for determination that such construction will not adversely affect the stability, safety, and functioning of the protective facilities, and for definition of conditions under which permit should be granted. These conditions will include, among others, the following items:

- (1) That all work shall be performed:

- (a) In accordance with standard engineering practice and in accordance with plans and specifications approved by the District Engineer or his authorized representative; drawings or prints of proposed improvements or alterations to the existing flood control works must be submitted for approval to the State Reclamation Board sufficiently in advance of the proposed construction to permit adequate study and consideration of the work.
 - (b) To the satisfaction of the District Engineer.
- (2) After completion of the work, "As Constructed" drawings or prints, in duplicate showing such improvements as finally construction shall be furnished the District Engineer.

f. Coordination of Local Activities. In accordance with the provisions of Flood Control Regulations, paragraph 208.10(a)(9), the Superintendent will, during periods of flood flow, coordinate the functions of all agencies, both public and private, that are connected with the protective works. Arrangements shall be made with the local law enforcement agencies, street departments, and railroad and utility companies for developing a coordinated flood-fighting program; and an outline of this program shall be filed with the District Engineer.

g. Inspection.

- (1) Flood Control Regulations, paragraph 208.10(b)(1), are quoted in part as follows:
 - "(b) Levees (1) Maintenance . . . Periodic inspections shall be made by the Superintendent to insure that . . . maintenance measures are being effectively carried out . . . Such inspections shall be made immediately prior to the beginning of the flood season, immediately following each major high water period, and otherwise at intervals not exceeding 90 days and such intermediate times as may be necessary to insure the best possible care of the levee."
- (2) For sake of uniformity, and to the extent practicable, the dates of inspection shall be as follows: 1 November, 1 May, and immediately following each flood flow in excess of a reading of 12.0 on the gage located on the right bank of Big Chico Creek; or 10.0 on the gage on the left bank of the Diversion Channel; or a reading of 15.0 on the gage located on the left bank of Mud Creek as defined in paragraph 1-06 of this manual.

- (3) The suggested check lists and instructions shown in EXHIBIT E, Sheets 1, 7, to 11 inclusive, are to be followed in each inspection to insure that no features of the protective system are overlooked. Check lists locally typed or printed in conformity with sheets 2, 4, 6, to 9 shall have printed on the reverse side of the applicable instructions shown on sheets 3, 5, and 10, EXHIBIT E. Carbon copy of the inspector's original field notes as recorded on the check list shall be transmitted to the District Engineer immediately following each inspection, and one copy included as an inclosure to the semi-annual report as provided in paragraph 3-07(i)(1) of this manual.

h. Maintenance.

- (1) Flood Control Regulations, paragraph 208.10(b)(1) are quoted in part as follows:

"(b)(1) Maintenance. The Superintendent shall provide at all times such maintenance as may be required to insure serviceability of the structures in time of flood. Measures shall be taken to promote the growth of sod as required, exterminate burrowing animals, and to provide for removal of wild growth and drift deposits, and repair of damage caused by erosion or other forces . . . Immediate steps will be taken to correct dangerous conditions disclosed by such inspections. Regular maintenance repair measures shall be accomplished during the appropriate season as scheduled by the Superintendent."

- (2) Full responsibility for making the repairs and the methods used is placed on the Superintendent (through the State Reclamation Board), but the experience and facilities of the District Engineer will be available to him for advice and consultation.
- (3) All repairs shall be made in accordance with standard engineering practice, to line and grade and in accordance with details shown on the construction drawings for the project works, copies of which are included in Exhibit B. No change or alteration shall be made without prior determination by the District Engineer

that such alteration will not adversely affect the stability and functioning of the protective facilities. Plans and specifications of all changes or alterations that may be proposed by the Superintendent shall be submitted to the District Engineer for investigation and approval before prosecution of the work.

1. Reports.

(1) Semi-Annual Report. In accordance with the provisions of the Flood Control Regulations, paragraph 208.10(a)(6), the State Department of Water Resources shall submit within a 10-day period following 1 December and 1 June of each year, a semi-annual report to the District Engineer covering inspection, maintenance, and operation of the protective works. This report will present a statement of:

- (a) The physical conditions of the protective works as summarized from the logs of inspection.
- (b) Flood occurrences and behavior of the protective works, and flood-fighting activities during the period.
- (c) Prosecutions for encroachment or trespass.
- (d) Permits issued for right-of-way or use of right-of-way.
- (e) Permits issued for improvements or construction within the project right-of-way.
- (f) Maintenance measures taken; nature, date of construction, and date of removal of temporary repairs; date of permanent repairs.
- (g) Fiscal statement of cost and maintenance and operation for the period.

A suggested form for submission of the semi-annual report is included as EXHIBIT D, Sheets 1 and 2.

3-08. Inspection Procedure. Since the enactment of State Legislation of Chapter 1528, Statutes of 1947, the Department of Water Resources, State of California, has made semi-annual inspections of all levees of authorized flood control projects in the Sacramento-San Joaquin drainage basin pursuant to the Federal Regulations as of 1 January 1962 (Title 33) and reports its findings to the local agency, the State Reclamation Board and the District Engineer of the U. S. Army Engineer District, Sacramento. This activity, initiated pursuant to Section 203.10(a) of the Federal Regulations, has in effect provided for transfer from the local agencies to the State Department of Water Resources the obligation of compliance with Sections 8371, 8372, and 8373 of the Water Code of the State of California. These sections of the Code require the local responsible agencies to submit a report to the State Department of Water Resources on or before 1 June of each year on the condition of the levees and channels within their jurisdiction. Supervisory powers and duties of the Department are applicable to all works of the authorized projects maintained and operated by the local agencies without regard to status of completion, or expenditure of Federal funds on the construction of such works.

The following procedure is used in inspecting the levees of the responsible maintaining agency:

Personnel of the State Department of Water Resources make a detailed inspection of the levees in the spring and fall of each year and note any required maintenance. The levee inspection objectives are to determine if the following items, which are a condensation of Federal Regulations, are being adhered to:

(a) That all brush, trees and wild growth other than sod are removed from levee crown and slopes.

(b) That all weeds, grass and debris on the levee have been burned during the appropriate season, where not dangerous or impractical.

(c) That all grass and weeds on the levee have been mowed where removal by burning is dangerous or impracticable. This applies only on peat levees or where burning would constitute a hazard to improvement.

(d) That all burrowing animals have been exterminated.

(e) That all caves, slough, burrows, holes, slips, or other damaged portions of the levee have been repaired.

(f) That all irrigation and drainage structures through the levees are in good working condition.

(g) That no revetment work or riprap has been displaced, washed out or removed.

(h) That the crown of the levee is well shaped and maintained, and that unauthorized vehicular travel is restricted.

(i) That stock grazing on the levee is restricted to conditions and seasons when the levee would not be seriously scarred or otherwise damaged thereby.

(j) That encroachments are not being erected on the levee which would hinder travel by authorized patrol vehicles.

(k) Prevent the erection of structures on, additions to, or alterations of, the levee unless authorized by permit from the State Reclamation Board.

Following this detailed inspection, a joint field inspection is made with the Superintendent and/or his assistants, who represent the maintaining agency, and representatives of the State Department of Water Resources to review and discuss the inspection report.

Upon completion of the fall inspection the State Department of Water Resources publishes an annual report entitled, "Status of Project Levee Maintenance" which indicates the degree of proficiency attained by each obligated local agency in providing required maintenance.

SECTION IV

FEATURES OF THE PROJECT SUBJECT TO FLOOD CONTROL REGULATIONS

4-01. Project Works. Construction along Chico and Mud Creeks and Sandy Gulch, as covered by this manual, consists of channel improvement extending from the junction of Chico Creek and the Sacramento River upstream to high ground. The units of work include (a) diversion structures near the head of Sandy Gulch (Lindo Channel) and on Chico Creek to divert excess Chico Creek flood flows to Mud Creek; (b) a diversion channel to Mud Creek via Sycamore Creek and related left bank levee; (c) levees along both banks of Mud Creek and tributaries and channel enlargement as required; (d) bank protection on both banks of Mud and Sycamore Creeks where needed to prevent erosion due to high stream velocities; and (e) drainage structures as required through the new levees. For further details see the drawings of EXHIBIT B.

4-02. Levees. Levees have been built as required to adopted grade and section by new construction with a 12-foot crown width and side slopes of 1 on 3 waterside and 1 on 2 landside. The levee height varies from about 3 feet to 10 feet and is set back due to channel enlargement to provide capacity for the project design flow and to provide a nominal berm width of about 20 feet between the top of the channel bank and the waterside levee toe. The patrol road surfacing consists of 4 inches of crushed mineral aggregate 10 feet in width. Surfaced access ramps and the necessary turnouts and turnarounds have been provided. For more complete detail of items included in construction of the above-mentioned levee, refer to the "As Constructed" drawings of EXHIBIT B. Regulations regarding inspection, maintenance and operation will be found in paragraphs 4-02b, 4-02c, and 4-02d of this manual.

b. Inspection.

(1) Pertinent Requirements of the Code of Federal Regulations. Flood Control Regulations, paragraph 208.10(b)(1), are quoted in part as follows:

"(b) Levees - (1) Maintenance . . . Periodic inspection shall be made by the Superintendent . . . to be certain that

- (i) No unusual settlement, sloughing, or material loss of grade of levee cross section has taken place;
- (ii) No caving has occurred on either the landside or the riverside of the levee which might affect the stability of the levee section;

- (iii) No seepage, saturated areas, or sand boils are occurring.
- (iv) Toe drainage systems and pressure relief wells are in good working condition, and that such facilities are not becoming clogged;
- (v) Drains through the levees and gates on said drains are in good working condition;
- (vi) No revetment work or riprap has been displaced, washed out, or removed;
- (vii) No action is being taken, such as burning grass and weeds, during inappropriate seasons, which will retard or destroy the growth of sod; (see Note (a) at end of subparagraph (1)).
- (viii) Access roads to and on the levee are being properly maintained;
- (ix) Cattle guards and gates are in good condition;
- (x) Crown of levee is shaped so as to drain readily, and roadway thereon, if any, is well shaped and maintained;
- (xi) There is no unauthorized grazing or vehicular traffic on the levees;
- (xii) Encroachments are not being made on the levee right-of-way which might endanger the structure or hinder its proper and efficient functioning during times of emergency.

Such inspections shall be made immediately prior to beginning of the flood season; immediately following each major high water period, and otherwise at intervals not exceeding 90 days; and such intermediate times as may be necessary to insure the best possible care of the levee . . ."

Note (a)

Since the growth of sod on the slopes of the levees of this project is not practicable and as the nature of the levee growth warrants burning thereof to facilitate inspection, the provision of subparagraph b(1) of the regulations inconsistent therewith shall not apply. In place of item (vii), therefore, the following shall be observed:

Weeds, grasses and debris on the levee shall be burned during appropriate seasons, where not dangerous or impracticable, in order to permit the detection of cracks, holes, burrows, slips, and other damage and to permit the detection and extermination of burrowing animals. Grass and weeds on levee slopes shall be mowed where removal by burning is dangerous or impracticable, such as on peat levees or where burning would constitute a hazard.

- (2) To insure the taking of such maintenance measures as will be required for proper functioning of the levee, the following items shall be specifically covered in each inspection:
 - (a) Aggradation or degradation of the stream bed along the toe.
 - (b) Settlement of levee fill.
 - (c) Erosion of levee slopes; both sides of levees.
 - (d) Presence of seepage; saturated areas, or sand boils back of levee.
 - (e) Condition of access roads and roadway on levee.

c. Maintenance.

- (1) Repairs to Levee Embankment. Methods used for repair or reconstruction of the levee fill will depend on the extent of the damaged section. If of small extent, the most suitable method will be to bring the levee back to line and grade by a fill made in 6-inch layers of earth free from

brush, roots, sod or other unsuitable material. If of larger extent, the fill should be made in the same manner as the original construction, of selected material from borrow pits approved for the project, placed in uniform layers of loose material and not more than 6 inches in depth and compacted in accordance with the specifications under which the work was completed or compacted according to approved construction practices, the Superintendent shall provide at all times such maintenance as may be required to insure serviceability of the levees in time of flood.

- (2) Depredations of Burrowing Animals. Dens and runways formed within the levee by burrowing animals are frequently the causes of levee failures during flood stages. Burrowing animals such as muskrats, ground hogs, ground squirrels, moles and gophers, found in the levee should be exterminated. The dens and runways should be opened up and thoroughly compacted as they are backfilled. Levees kept properly cleared are not seriously menaced by burrowing animals as they prefer areas where a protective cover, such as high grass, weeds, and brush is found. Several methods of extermination are found effective, such as trapping, baiting, and poison gases, depending on the type of animal present and the time of year the work is done. Advice concerning the best methods in each locality can be obtained from the County Agricultural Agent.
- (3) Access Roads. Access roads to the levees shall be maintained in such condition that they will be accessible at all times to trucks used to transport equipment and supplies for maintenance of flood fighting.

d. Operation.

- (1) Pertinent Requirements of the Code of Federal Regulations.. Flood Control Regulations, Par. 208.10 (b)(2) are quoted in part as follows:
 - "(2) Operation. During flood periods, the levee shall be patrolled continuously to locate possible sand boils or unusual wetness of the landward slope to be certain that:

- (i) There are no indications of slides or sloughs developing;
- (ii) Wave wash or scouring action is not occurring;
- (iii) No low reaches of levee exist which may be overtopped;
- (iv) No other conditions exist which might endanger the structures.

Appropriate advance measures will be taken to insure the availability of adequate labor and materials to meet all contingencies. Immediate steps will be taken to control any condition which endangers the levee and to repair the damaged section.

- (2) It shall be the duty of the local agency responsible for maintenance to keep in contact with the State Department of Water Resources' Flood Operation Center during all periods of flood danger as necessary to take advantage of its forecasts and maintain a patrol of the project works in their area during periods of flood in excess of reading of 12.0 on the Big Chico Creek gage, 10.0 on the Diversion Channel gage, or 15.0 on the Mud Creek gage as referred to in paragraph 1-06 of this manual.

The Flood Operations Center is responsible for data collection and issuance of a joint stream forecast with the U. S. Weather Bureau and coordinates with the Sacramento District Engineer, and other agencies to keep apprised of the current situation in accordance with terms of the Memorandum of Understanding dated 1 November 1956, between the Division Engineer, U. S. Army Engineer Division, South Pacific, and the Director, Department of Water Resources, State of California, for cooperative action during flood emergencies.

4-03. Channels and Floodways.

a. Description. The channels of Chico and Mud Creeks, Sycamore Creek and the Diversion Channel extend from the Sacramento

River upstream a distance of about 13.5 miles. There are also improved tributary channels. Channel improvement with a bottom width that varies from about 120 feet to 180 feet, consisted mostly of clearing between levees or banks and channel enlargement from degrading and borrowing operations. The unimproved channels indicated on Exhibit A-1 shall be maintained to existing non-damaging capacities of 1,500 cubic feet per second for Big Chico Creek and 6,000 cubic feet per second for Lindo Channel and Sandy Gulch. Regulations regarding inspection, maintenance, and operation of channels and floodways will be found in paragraphs 4-03b, c and d of this manual.

b. Inspection.

- (1) Pertinent Requirements of the Code of Federal Regulations. Flood Control Regulations, Para. 208.10(g)(1) are quoted in part as follows:
 - (i) The channel or floodway is clear of debris, weeds, and wild growth;
 - (ii) The channel or floodway is not being restricted by the depositing of waste materials, building of authorized structures or other encroachments;
 - (iii) The capacity of the channel or floodway is not being reduced by the formation of shoals;
 - (iv) Banks are not being damaged by rain or wave wash, and that no sloughing of banks has occurred;
 - (v) Riprap sections and deflection dikes and walls are in good condition;
 - (vi) Approach and egress channels adjacent to the improved channel or floodway are sufficiently clear of obstructions and debris to permit proper functioning of the project works.

Such inspections shall be made by the Superintendent prior to the beginning of the flood season and otherwise at intervals not to exceed 90 days. Immediate steps will be taken to remedy any adverse conditions disclosed by such inspections . . ."

- (2) The purpose of the flood-flow channels inspection is to insure that conditions which affect the channel capacity will remain the same, as far as possible, as those considered in the design assumptions and that no new conditions develop that may affect the stability of the

project structures. At each inspection required by Par. 208.10(g)(1) of the Flood Control Regulations, particular attention will, therefore, be given the following:

- (a) Location, extent and size of vegetal growth.
- (b) Unauthorized operations within the flood-flow channel right-of-way, such as excavations, buildings and other structures, levees, bank protection, or training dikes.
- (c) Rubbish and industrial waste disposal.
- (d) Changes in the channel bed such as aggradation or degradation, which would interfere with free-flow from side drainage structures or induce local meanders that would scour the banks.
- (e) Operations of any nature upstream from the project that would affect flow conditions within the limits of the flood control project.
- (f) Condition of project structure.

1. Channel walls;

- a. Deviation from alignment and grade.
- b. Development of cracks and spalls.
- c. Mechanical injuries.

2. Fencing.

- a. Injuries to post, fencing or barbed wire.
- b. Damage to galvanizing.

3. Earth fills:

- a. Settlement.
- b. Erosion of both slopes.
- c. Excessive seepage or saturation area back of fills.
- d. Condition of bank protection - concrete or stone blanket.

4. Right-of-way:

a. Presence of dumped refuse.

b. Encroachment or trespass.

- (3) No excavation within the limits of this unit of the Chico and Mud Creeks and Sandy Gulch Project will be permitted unless an excavation permit has been approved by the State Reclamation Board.
- (4) If any work is done to improve flow conditions along the Chico and Mud Creeks and Sandy Gulch Project an excavation permit must be obtained from the State Reclamation Board.
- (5) The intent of these inspections is to disclose all conditions which in any way affect the stability of the structures and their functioning for the control of floods. Each inspection report should note and comment on any repair measures that have been taken since the last inspection. In making these inspections, the check sheets included as EXHIBIT E shall be explicitly followed.

c. Maintenance.

- (1) Pertinent Requirements of the Code of Federal Regulations. Flood Control Regulations, Par. 208.10(g)(1) are quoted in part as follows:

" Immediate steps will be taken to remedy any adverse conditions disclosed by such inspection. . . . "

- (2) Shoaling or aggradation at the inlets or outlets of side drainage structures may render them inoperative. It is, therefore, imperative that all drains be kept open and unobstructed at all times.
- (3) Dumped rock or other suitable types of protection should be placed at locations found by experience to be critical trouble points, with a view to stabilizing the channel alignment and preserving the general uniformity of the bank lines.

- (4) Sediment and debris plugs or other obstructions should be removed from the channel to prevent any tendency for the flows to be deflected within the channel. The heavy material likely to accumulate in the new channel at the mouths of tributaries should be removed to keep the channel clear.
- (5) The channel and right-of-way shall be kept reasonably clear of debris, refuse matter, or industrial wastes.
- (6) Weeds and other vegetal growth in the channel shall be cut in advance of flood season and together with all debris, removed from the channel.
- (7) All eroded concrete shall be repaired as soon as any reinforcing steel is exposed or erosion approaches a depth of 4 inches. For this purpose, it is recommended that the repair be made by thoroughly clearing the surface by sandblasting and building up the section with pneumatically placed Portland cement mortar. All evidence of settlement, uplift, or failure of concrete structures shall be referred to the State Department of Water Resources for analysis and remedial measures.
- (8) All damage to fencing, whether resulting from accidental or willful injuries or from corrosion, shall be promptly repaired with new material in order to maintain satisfactory protection to the public.

d. Operation.

- (1) Pertinent Requirements of the Code of Federal Regulations, Par. 208.10(g)(2) are quoted in part as follows:

"(g) Channels and floodways . . . (2) Operation. Both banks of the channel shall be patrolled during periods of high water Appropriate measures shall be taken to prevent the formation of jams of debris. Large objects which become lodged against the bank shall be removed. The improved channel or floodway shall be

thoroughly inspected immediately following each major high water period. As soon as practicable thereafter all snags and other debris shall be removed and all damage to . . . walls, drainage outlets or other flood control structures repaired."

e. Special Instructions.

- (1) Revetment Work. Due to the fact that many reaches of contiguous bank have been constructed with stone protection work consisting of quarry stone or cobbles, the provisions of paragraphs 4-03b(1)(v) and 4-03b(2)(f)d. are expanded to include the following:
 - (a) Where scour, wash, settlement or failure of a portion of the originally provided stone protection has been noted, or where inspection indicates that such damage may result during the next flood or high water period, the scour or wash shall be filled with earth free from brush, roots, sod or other unsuitable material and additional stone shall be placed upon the earth fill to bring the stone protection to its original section. In case of emergency and when stone is not available, sand bags or bags filled with gravel may be used for temporary repair measures.
 - (b) When permanent repair of the stone protection is made, the stone used shall, as far as possible, be similar to the kind and gradation as originally used, and shall be placed to the thickness as shown on the drawings of EXHIBIT B.
 - (c) In the event an inspection reveals that due to scour, settlement or other causes, stone protection on the levee or bank is required beyond the limits of the original construction or in reaches of the levee or bank not originally provided with such protection, local interests will provide additional sloping of the bank and placement of stone protection as needed to protect completed work. The work shall be done in a manner acceptable under standard engineering practice.

- (d) Trees and brush should not be allowed to grow through the stone blanket to the extent that it displaces the stone or causes increase in velocities against the bank. The brush or trees should be cut at least every other year. Herbicides may be used if proper precautions are taken to prevent damaging drift, poisoning of the water or damage to adjacent crop lands.

4-04. Drainage and Irrigation Structures.

a. Description. Drainage and irrigation structures which extend through the levee are listed as follows:

Levee Mile	Size of Pipe	Bank	Other Structural Description	Feet Below Crown
---------------	-----------------	------	------------------------------	---------------------

Unit No. 1 - Right Bank Mud Creek

0.26	24"	Rt.	Flapgate W.S.	12.5
1.03	24"	"	" "	12.0
1.95	24"	"	" "	13.0
3.11	24"	"	" "	8.5
3.27	24"	"	" "	9.0
3.48	24"	"	" "	10.0
4.08	24"	"	" "	9.0
4.58	24"	"	" "	13.0
4.94	24"	"	" "	15.0
5.22	36"	"	Riser unit W.S.	17.0
6.69	24"	"	Flapgate W.S.	6.0
7.01	18"	"	" "	2.0

Unit No. 2 - Left Bank Mud Creek

0.25	24"	Lt.	Flapgate W.S.	6.6
1.34	24"	"	" "	12.5
1.55	24"	"	" "	11.0
2.13	24"	"	" "	11.0
2.44	24"	"	" "	10.0
2.86	24"	"	" "	10.0
3.64	24"	"	" "	6.5
4.77	24"	"	" "	10.0
5.83	24"	"	" "	11.5
6.30	2-42"	"	River unit W.S.	16.0

Levee Mile	Size of Pipe	Bank	Other Structural Description	Feet Below Crown
---------------	-----------------	------	------------------------------	---------------------

Unit No. 2 - Left Bank Mud Creek, cont'd

6.35	24"	Lt.	Flapgate W.S.	12.0
6.65	24"	"	" "	15.5
7.17	24"	"	" "	15.0
7.46	3-48"	"	Riser unit W.S.	18.0
8.09	24"	"	Flapgate W.S.	18.0

Unit No. 3 - Right Bank Sycamore Creek and Both Banks
of Sheep Hollow Creek

0.09	42"	Rt.	Riser unit W.S.	14.0
0.39	3-48"	"	" " "	11.7
1.28	24"	"	Flapgate W.S.	11.7
1.53	24"	"	" "	11.0
2.00	24"	"	" " (Sheep Hollow)	8.0
2.23	24"	Lt.	" " (Sheep Hollow)	6.0
3.16	24"	Rt.	" " (Sycamore)	11.0
3.28	24"	"	" " "	11.0
3.43	24"	"	" " "	10.5
3.59	24"	"	" " "	9.5
3.76	24"	"	" " "	7.5
3.78	24"	"	" " "	10.0

Unit No. 4 - Left Bank Sycamore Creek and Dry Creek

0.28	24"	Lt.	Flapgate W.S.	10.0
0.34	24"	"	" "	9.5
0.36	24"	"	" "	8.0
0.66	18"	Rt.	Pipe open on both ends (Dry Creek)	4.0
0.74	14"	Rt.	Flapgate W.S. (Dry Creek)	3.5
0.96	24"	Lt.	Flapgate W.S. (Sycamore Creek)	9.0
0.98	24"	"	Siphon - Riser unit W.S. (Sycamore Creek)	9.5
1.15	24"	"	Flapgate W.S.	11.0
1.41	24"	"	" "	13.0
2.22	24"	"	" "	11.0
2.56	24"	"	" "	11.0

NOTE ON ABBREVIATIONS:

W.S. = Waterside
L.S. = Landside
Rt. = Right
Lt. = Left

b. Inspection.

- (1) Pertinent Requirements of the Code of Federal Regulation. Flood Control Regulations, paragraph 208.10 (d) (1), are quoted in part as follows:

"(d) Drainage Structures (1) Maintenance - Adequate measures shall be taken to insure that inlet and outlet channels are kept open and that trash, drift, or debris is not allowed to accumulate near drainage structures. Flapgates and manually operated gates and valves on drainage structures shall be examined, oiled and trial operated at least once every 90 days Periodic inspections shall be made by the Superintendent to be certain that:

- (i) Pipes, gates, operating mechanism, riprap and headwalls are in good condition;
- (ii) Inlet and outlet channels are open;
- (iii) Care is being exercised to prevent the accumulation of trash and debris near the structures and that no fires are being built near bituminous coated pipes;
- (iv) Erosion is not occurring adjacent to the structure which might endanger its water tightness or stability. Immediate steps will be taken to repair damage, replace missing or broken parts, or remedy adverse conditions disclosed by such inspections."

- (2) At each inspection the following items, if applicable, shall be particularly noted:

- (a) Debris or other obstructions to flow.
- (b) Condition of pipes and gates.
- (c) Damage or settlement of pipe.
- (d) Condition of concrete-cracks, spalls, erosion.

c. Maintenance.

- (1) All eroded concrete shall be repaired as soon as erosion reaches a depth of 4 inches or any reinforcing steel is exposed. For this purpose it is recommended that the repair be made by thoroughly cleaning the surface by sandblasting and building up concrete to its original section with pneumatically-placed Portland

cement mortar. All evidence of settlement, uplift, or failure of concrete structures should be referred to the State Department of Water Resources for analysis and recommendation of remedial measures.

- (2) If the inspection shows that the automatic drainage structures have been jammed in an open position by debris or other obstructions, they shall be thoroughly cleaned so that they swing freely to a true closure. If any parts of the gates have been damaged or broken, they shall be replaced by new parts.
- (3) Compliance with the provisions prescribed above pertaining to drainage structures is essential for proper maintenance of the levee system covered by this manual. Levee failures caused by neglected drainage structures are of common occurrence; it is, therefore, of utmost importance that these structures always be kept in perfect working condition in accordance with the regulations.
- (4) Care should be taken not to bury any of the side drainage inlets in the event that it becomes necessary to fill any of the low-lying pockets in back of the levee. Plans for the maintenance of drainage facilities at any such points should be submitted to the State Reclamation Board for approval before such work is started.

d. Operation.

- (1) Pertinent Regulations of the Code of Federal Regulations. Flood Control Regulations, paragraph 208.10(d) (2) are quoted in part as follows:

"(2) Operation. Whenever high water conditions impend, all gates will be inspected a short time before water reached the invert of the pipe and objects which might prevent closure of the gate shall be removed. Automatic gates shall be closely observed until it has been ascertained that they are securely closed All drainage structures in the levee shall be inspected frequently during floods to ascertain whether seepage is taking place along the lines of their contact with the embankment. Immediate steps shall be taken to correct any adverse conditions."

- (2) The outlets of the side drainage structures inundate at relatively low river stages. They should, therefore, be inspected at the first sign of a rise in the river to make certain that the gates are not jammed in an open position and thus allow flood waters to enter behind the levee.

4-05. Miscellaneous Facilities.

a. Description. Miscellaneous structures or facilities which were constructed as a part of, or existed in conjunction with, the protective works, and which might affect their functioning, include the following:

(1) Bridges.

- (a) Sutter Avenue Bridge across Big Chico Creek at Station 17+00.
- (b) Sacramento Avenue Bridge across Mud Creek at Station 93+82.
- (c) Meridian Avenue Bridge across Mud Creek at Station 182+74.
- (d) State Highway No. 32 Bridge across Mud Creek at Station 206+02.
- (e) Southern Pacific Railroad Bridge across Mud Creek at Station 222+90.
- (f) Bell Road Bridge across Mud Creek at Station 239+42.
- (g) Nord Highway Bridge across Mud Creek at Station 315+76.
- (h) Old U. S. Highway 99E Bridge across Mud Creek at Station 348+20.
- (i) New U. S. Highway 99E Bridge across Mud Creeek at Station 356+00.
- (j) Hicks Lane Bridge across Sycamore Creek at Station 402+80.
- (k) Sacramento Northern Railroad Bridge across Sycamore Creek at Station 485+42.
- (l) Cohasset Highway Bridge across Sycamore Creek at Station 486+06.
- (m) Wildwood Avenue across Diversion Channel at Station 643+60.
- (n) Eaton Road Bridge across Dry Creek at Station 5+00.

(For location of Stations see drawings of Exhibit B)

- (2) Utility Relocations. Because of the nature of the construction of utility crossings by local interests, records of utility relocations are not available.
- (3) Hydrologic Facilities. A continuous water stage recorder and staff gage located on the left bank of the Diversion Channel and on the left bank of Mud Creek. These stream flow stations to be operated and maintained by the State Department of Water Resources. Also three cableways (Mud Creek Station 350+76, Diversion Channel Station 646+75 and downstream from Longfellow Avenue across Lindo Channel.)

4-05 a. (revised)

(4) A Diversion Structure to be operated and maintained by the city of Chico located on Big Chico Creek near its bifurcation with Sandy Gulch consists of a 4-barreled reinforced concrete culvert, each barrel 5 feet square with related headwalls and wingwalls designed to carry a roadway 12 feet wide. Three wood slide gates and one metal slide gate with pedestal lifts have been provided to control the flow through the structure. These gates are hand operated.

Big Chico Control Structure

(5) A Diversion Structure to be operated and maintained by the city of Chico located on Lindo Channel about one-quarter mile downstream from its bifurcation with Chico Creek consists of a 7-barreled concrete culvert, with six barrels 7 feet - 3 inches high by 7 feet wide and the center barrel 8 feet - 3 inches high by 7 feet wide with related headwalls and wing walls. Hand operated wood slide headgates with pedestal lifts have been provided to control flows through the structure.

Lindo Channel Control St.

Wing walls. Slots have been provided for stop logs at the heads of the culvert openings.

- (6) A Concrete Ogee Weir to be operated and maintained by local interests, 178 feet long with crest at elevation 268.25 feet and related wingwalls is located at the beginning of the diversion channel one-quarter mile downstream from the Sandy Gulch bifurcation with Chico Creek, just northerly of the 7-barreled Sandy Gulch diversion structure.

Lindo Channel Div Weir

4-05 a. (added)

(7) A Concrete Sill to be operated and maintained by the city of Chico 161 feet long with crest elevation 265.0 feet (C. of E. datum) and related wing walls is located at the head of Lindo Channel near the Big Chico Creek Culvert (Centerline Station 663+05). At the center of the concrete sill two 6-foot openings have been provided with invert elevation at 263.0 (C. of E. datum). Slots have been provided for 3" x 12" x 5'-11" flashboards to control low water flows.

100 footer in place - City now pushes up gravel dike to create swimming hole.

"(h) Miscellaneous Facilities. (1) Maintenance. Miscellaneous structures and facilities constructed as a part of the protective works and other structures and facilities which function as a part of, or affect the efficient functioning of the protective works, shall be periodically inspected by the Superintendent and appropriate maintenance measures taken. Damaged or unserviceable parts shall be replaced without delay"

- (2) Inspection of the miscellaneous facilities shall be made at the same time that the inspection of the other features of the project are made, and shall be reported on check list No. 3, sheet No. 4 of EXHIBIT E.
- (3) The interest of the Corps of Engineers and the responsibility of the local interests in the existing highway and railroad bridges is confined to their effect on the safety and functioning of the flood control channel, but any conditions noted in the inspections that may affect them in any way should, as a matter of courtesy, be brought to the attention of the agencies maintaining and operating them. If the inspection of any miscellaneous structure, either existent or constructed in the future under permit, discloses any condition that indicates the probability of failure during periods of high water, the Superintendent shall address a letter to the owner of the structure, quoting this manual as authority and inviting attention to the conditions observed and requesting that immediate steps be taken to correct them. A copy of such letter shall be forwarded to the District Engineer for his information. A report on the action taken by the owner shall be submitted to the District Engineer to accompany the next semi-annual report. A suggested report form is included as EXHIBIT D of this manual.
- (4) The purpose of maintenance work is to insure continuous satisfactory operation of equipment. It is, therefore, important in such work that all possible causes of future trouble be found and corrected. Particular attention should be given to minor weaknesses which may be an indication of future trouble.

c. Operation.

(1) Requirements of the Code of Federal Regulations.
Flood Control Regulations, paragraph 208.10(h)(2)
is quoted as follows:

"(2) Operation. Miscellaneous facilities shall be operated to prevent or reduce flooding during periods of high water. Those facilities constructed as a part of the protective works shall not be used for purposes other than flood protection without approval of the District Engineer unless designed therefor."

4-05 c. (revised) Big Chico Creek Culvert Structure

(2) Big Chico Creek Culvert Structure. - Slide gates on the diversion structure at Chico Creek will be raised to full open position during the flood season from 15 October to 15 April, or as directed by the State Reclamation Board. The slide gates shall be opened in such a manner as to avoid rapid drawdown of the upstream pool which could cause caving and sloughing of the upstream channel banks and erosion of the downstream channel banks due to high velocities. The slide gate on the westerly end shall be used for the purpose of flushing the swimming pool periodically during the summer season. At all other times, during the swimming pool operation, the gate will be closed. During the swimming pool operation, continuous flow on Big Chico Creek will be maintained by regulation of the slide gates as needed. Across the gate on the westerly end a screen has been provided for use as a safety measure to prevent swimmers from being drawn through the opening. During the flood season from 15 October to 15 April, or as directed by the State Reclamation Board, all slide gates will be maintained in a fully open position. The swimming pool operation will be conducted by the city of Chico.

as a safety measure to prevent swimmers from being drawn through the opening. During the flood season from 15 October to 15 April, or as directed by the State Department of Water Resources, all flashboards will be removed. The swimming pool operation will be conducted by the City of Chico.

4-05 c. (revised)

(3) Lindo Channel Culvert Structure. - Slide gates on the diversion structure located on Lindo Channel will be raised to full open position during the flood season from 15 October to 15 April, or as directed by the State Reclamation Board. Slide gates shall be opened in such a manner as to avoid rapid drawdown of the upstream pool which could cause caving and sloughing of the upstream channel banks, and erosion of the downstream channel banks due to high velocities.

4-05 c. (added)

(4) Operation of the flashboards in the concrete sill to be conducted by the city of Chico for the purpose of regulating flow down Lindo Channel during periods of low flow. Flashboards shall be removed in such a manner as to avoid rapid drawdown of the upstream pool which could cause caving and sloughing of the upstream channel banks or erosion of the downstream channel due to high velocities.

SECTION V

SUGGESTED METHODS OF COMBATING FLOOD CONDITIONS

5-01. Methods Suggested. Most of the methods described herein have been developed during years of experience with the various problems that often come up during periods of high water, and they are not intended to restrict the Superintendent, or others concerned, to a rigid set of rules for every condition that may arise. The remarks are primarily concerned with the earthen portions of the levee system. If problems not covered by these suggestions arise, where the Superintendent is in doubt as to the procedure to be taken, he will be expected to consult the State Department of Water Resources, and follow standard engineering practices in meeting the situation. It should be noted that it is much better to be over-prepared for a "flood-fight" than to find at the last moment that preparations were incomplete or unsatisfactory. Confidence of the protected persons and firms is a valuable asset that should not be carelessly lost through inefficient operation of the protection system in time of emergency.

5-02. Earthen Levees. An earthen levee is in danger whenever there is water against it. This danger is directly proportional to the height of the water, the duration of the flood stage, and the intensity of either the current or wave action. The danger is inversely proportional to the cross-sectional area of the levee, the levee's height, and the degree of maintenance. A well constructed levee of proper section should, if maintained and not overtopped, hold through any major flood. However, a serious accident may result in a break. Foundation troubles result in sand boils or a sinking levee, and the local use of unsatisfactory materials causes slides and sloughs. However, such threatened failures can be met if prompt action is taken and proper methods of treatment are used. Wave wash is to be expected whenever the levee is exposed to a wide stretch of open water and is serious if permitted to continue over a considerable length of time.

5-03. Premeditated Damage. Local interests should continually guard against premeditated damage to the levee. In the event of an extraordinary flood requiring a fight over long stretches of levee on both sides of the river, there is a natural temptation to relieve the strain by premeditated breaking of the opposite levee.

5-04. Security. Personnel of the Corps of Engineers, whether military or civilian, are not vested with any civil police authority in the performance of their engineering duties, and they will not attempt to exercise any such authority. The responsibility for protecting flood control works against sabotage, acts of depredation or other unlawful acts rests with the local interests through local and State Government agencies.

5-05. Inspection of Flood Control Works. Immediately upon receipt of information that high water is imminent, local interests responsible for maintenance should form a skeleton organization, capable of quick expansion, and assign individuals (Sector Foremen) to have charge of definite sections of levees. As his initial activity, each Sector Foreman should go over his entire sector and parts of adjacent sectors, making a detailed inspection, particularly with reference to the following matters:

- a. Sector limits; ascertain that the dividing line between sectors is plainly determined and, if necessary, marked.
- b. Condition of new levees and recent repairs.
- c. Condition of culverts, flap gates, and sluice gates.
- d. Transportation facilities; roads, rail and water communications.
- e. Material supply; quantity, location and condition.
- f. Communications; locate and check all necessary telephones in the sector.

5-06. Preliminary Repair Work. After the initial inspection has been made, each Sector Foreman should recruit a labor crew and provide it with tools such as shovels, axes, wheelbarrows, etc. In addition, bulldozers, scrapers, trucks, etc. should be located and made ready for use in case of emergency. Then immediate action should be taken to perform the following work:

a. Fill up holes or washes in the levee crown, slopes, and landside berms. Where new construction has been completed during the year, rain washes and deep gullies may have developed. While the levee is new, preparations should be made to advance to combat wave wash along the exposed reaches.

b. Repair gaps where road crossings have been worn down and the levee is below grade. In filling the road crossings, it may be necessary to obtain material from landside borrow pits, in which case excavation for the material should be kept at least 50 feet from the toe of the levee. Any filling done in this connection should be tamped in place and, if in an exposed reach, subject to wave wash, the new section should be faced with bags of sand.

c. Repair and close all flap gates on culverts and see that they are seated properly before they are covered with flood waters.

d. Ascertain that all roads to and along the levee are in a good state of repair. The Superintendent should obtain assistance from the county road forces to have all roads put in first-class condition.

e. Locate necessary tools and materials (sacks, sandbags, brush, lumber, lights, etc.), and distribute and store the same at points where active maintenance is anticipated.

f. Check and obtain repair of all telephone lines necessary for operation, obtain lists of all team forces, motorboats, motor cars, and truck transportation that can be made available.

g. Make thorough arrangements with reliable citizens of the community for the supply transportation, subsistence, and shelter for the necessary labor.

h. Communicate directly with owners of all stock pastured on the levee and direct that all stock be removed from the levee right-of-way. Cut all fences crossing the levee that do not have gates provided.

i. Investigate all drainage ditches on the landside of the levee and open these drains when obstructions exist. Prepare to cut the necessary seep drainage ditches; however, no attempt should be made to drain the levee slope until actual seepage takes place.

5-07. Disaster Relief. It is the responsibility of local, state, municipal authorities, supported by and/or working connection with the American Red Cross to adopt measures for the relief of flood disaster victims. Relief measures can be undertaken by the Department of the Army through its Army Area Commander under existing Army Regulations, but such measures will be undertaken only as a last resort, in extreme cases and under compelling circumstances where local resources are clearly inadequate to cope with the situation.

5-08. Flood Fight. After the above preliminary organization and precautions have been completed, the "flood fight" itself commences. The methods of combating various defects in the earthen levee described in the following paragraphs have been proved effective during many years of use by the War Department.

a. Drainage of slopes. This work can be done economically while awaiting developments and will serve to make the levees more

efficient. Crews should be organized to cut seep drains at all places on the levee and berm when seepage appears. The drains should be V-shaped, no deeper than necessary, and never more than 6" deep. Care must be taken not to cut the sod unnecessarily. In all instances, drains should be cut straight down the levee slope or nearly so. Near the toe of the slope the small drains should be Y'd together and led into larger drains, which, in general, should lead straight across the landside berm into the landside pits or nearest natural or artificial drain.

b. Sand Boils. These danger spots are serious if discharging material. The common method of controlling sand boils consists of walling up a watertight sack ring around the boil up to a height necessary to reduce the velocity of flow to a point at which material is no longer discharged from the boil. See Exhibit "C" Plate 1. The sack ring around the boil should be large enough to protect the defective area immediately surrounding the boil. If several boils of sufficient force to displace sand are observed a sack sublevee may be build around the entire nest of boils, rising to such a height that none of the boils will discharge with enough force to displace sand.

c. Wave Wash. The Supervisor for local interests and Sector Foreman should study the levee beforehand to determine the possibility of wave wash. All such reaches will be located well in advance and for use in emergency, a reserve supply of filled sacks and rolls of cotton bagging will be kept on board flats. If the slope is well sodded, a storm of an hour's duration should cause very little damage. During periods of high wind and high water, ample labor should stand by and experienced personnel should observe where the washouts are beginning by sounding or by actually wading along the submerged slope. Sections of cotton bagging should be placed over the washed areas, as shown on Exhibit "C", Plate 3. As an alternative, filling sacks should be placed in the cut in an effective manner and as soon as possible. The filled sacks should be laid in sections of sufficient length to give protection well above the anticipated rise. Bagging so laid must be thoroughly weighted down to be effective. Plate 2, Exhibit "C" shows a movable type of wave wash protection, also used with good results. Its advantage is that it can be rapidly built at any convenient place and easily set in place on the job.

d. Scours. A careful observation should be made of the riverside of the levee at all localities where a current of more than two feet per second is observed, or where profiles show a high water slope of two feet per mile or greater. Trouble may be looked for at the ends of old levee dikes, road-crossing ramps, old traverses, and places where pipes, sewers and other structures penetrate the levee.

If any sign of scour is observed in the pits or at the ends of the dikes, soundings should be taken to observe the amount and progress of the scour. The approved method of construction to check scour in the pits, on the slopes, or at the ends of dikes will be to construct deflection dikes using brush, treetops, or lumber, driving stakes and wiring together, and filling in between with brush and filled sacks or stone.

e. Caving Bank Protection. As protection against active caving of riverbanks, rock-filled cribs are very effective if properly placed. Cribs are usually 14 by 14 feet in plan by 10 to 14 inches in inside depth. The cribs are constructed on a double thickness of 1" x 4" x 14' lumber, equivalent to 2" x 4" pieces, lapped rail fence fashion at all corners and intersections. They are divided into four compartments of about equal area by two perpendicular cross walls constructed in the same manner as the side walls. The floors and covers are built up of double 1" x 4" boards spaced about 9" center to center. Under the floor and perpendicular to the direction of the floor boards are five equally spaced pairs of 1" x 4" boards about 3 feet center to center. On top of the cover, perpendicular to the direction of the cover boards, are three pairs of top boards, one over each of the side walls and one over the central division wall. All intersections are nailed with one 20d nail. The compartments are filled with rock before covering. Each wall intersection of the fabricated cribs is securely fastened by a loop of No. 9 wire. See Exhibit "C", Plate 4.

5-09. Topping. Immediate consideration should be given the grade line of each levee section by comparison of existing grades with those shown on the drawings, Exhibit "B". If any reaches show a grade below the previous highest water, emergency topping should be undertaken at once to such a grade as may be established by the District Engineer of the U. S. Army Engineer District, Sacramento, as follows:

a. Sack topping. Sack topping may be used to raise the crown of the levee about three feet. The sacks should be laid stretchwise or along the levee for the first layer, crosswise for the second layer, and so on. Sacks should be lapped at least $\frac{1}{3}$ either way and well mauled into place. When properly sacked and tamped, one sack will give about three to four inches of topping. If gravel is available, it should be used for the front facing so as to avoid washing out.

b. Lumber and sack topping. This is the most commonly used method of raising low reaches in emergencies. In putting on this topping, as well as other topping, a careful line of levels should be run and grade stakes set in advance. 2" x 4" x 6' stakes should then be driven on the riverside of the crown six feet apart, and 1" x 12" boards nailed to the landside of the stakes. This wall, backed with a

single tier of sacks, will hold out at least one foot of water. If a second foot is necessary, the layers of sacks will have to be increased in number and reinforced. The stakes should be driven three feet in the ground, and should project out three feet, thus providing, in extreme cases, a three-foot topping if properly braced behind with sacks and earth. In some instances, it may be practicable to back up the planking with tamped earth obtained in the vicinity in lieu of the sacks as shown on the drawing, Exhibit "C", Plate 5.

5-10. Transportation. In instances where it is necessary to send equipment over roads that are impassable due to mud or sand, their passage may be provided by the use of a plank road or by means of steel or wire mats. Telephone communication should be provided along dangerous stretches of the levee when travel or other satisfactory means of communication cannot be maintained.

5-11. Use of Government Plant. The District Engineer is authorized to use or loan Government property and plant in cases of emergency where life is in danger and there is no opportunity to secure prior authority suitable private equipment is available, provided that such use is without detriment to the Government.

EXHIBIT A

FEDERAL FLOOD CONTROL REGULATIONS

**TITLE 33 - NAVIGATION AND
NAVIGABLE WATERS
(as of 1 January 1963)**

**Chapter 11 - Corps of Engineers
Department of the Army**

**PART 208 - Flood Control Regulations
MAINTENANCE AND OPERATION OF FLOOD
CONTROL WORKS**

Pursuant to the provisions of section 3 of the Act of Congress approved June 23, 1936, as amended and supplemented, (Sec. 3, 49 Stat., 1571 as amended; 43 U.S.C. 701e), the following regulations are hereby prescribed to govern the maintenance and operation of flood control works:

AUTHORITY: 11 208.10 to 208.81 issued under sec. 7, 44 Stat. 606; 33 U.S.C. 706. Additional authority is cited in parentheses following the sections affected.

§ 208.10 Local flood protection works; maintenance and operation of structures and facilities.

(a) **General.** (1) The structures and facilities constructed by the United States for local flood protection shall be continuously maintained in such a manner and operated at such times and for such periods as may be necessary to obtain the maximum benefits.

(2) The State, political subdivision thereof, or other responsible local agency, which furnished assurance that it will maintain and operate flood control works in accordance with regulations prescribed by the Secretary of the Army, as required by law, shall appoint a permanent committee consisting of or headed by an official hereinafter called the "Superintendent," who shall be responsible for the development and maintenance of, and directly in charge of, an organization responsible for the efficient operation and maintenance of all of the structures and facilities during flood periods and for continuous inspection and maintenance of the project works during periods of low water, all without cost to the United States.

(3) A reserve supply of materials needed during a flood emergency shall be kept on hand at all times.

(4) No encroachment or trespass which will adversely affect the efficient operation or maintenance of the project works shall be permitted upon the right-of-way for the protective facilities.

(5) No improvement shall be passed over, under, or through the walls, levees, improved channels or floodways, nor shall any excavation or construction be permitted within the limits of the project right-of-way, nor shall any change be made in any feature of the works without prior determination by the District Engineer of the Department of the Army or his authorized representative that such improvement, excavation, construction, or alteration will not adversely affect the functioning of the protective facilities. Such improvements or alterations as may be found to be desirable and permissible under the above determination shall be constructed in accordance with standard engineering practice. Advice regarding the effect of proposed improvements or alterations on the functioning of the project and information concerning methods of construction acceptable under standard engineering practice shall be obtained from the District Engineer or, if otherwise obtained, shall be submitted for his approval. Drawings or prints showing such improvements or alterations as finally constructed shall be furnished the District Engineer after completion of the work.

(6) It shall be the duty of the superintendent to submit a semiannual report to the District Engineer covering inspection, maintenance, and operation of the protective works.

(7) The District Engineer or his authorized representatives shall have access at all times to all portions of the protective works.

(8) Maintenance measures or repairs which the District Engineer deems necessary shall be promptly taken or made.

(9) Appropriate measures shall be taken by local authorities to insure that the activities of all local organizations operating public or private facilities connected with the protective works are coordinated with those of the Superintendent's organization during flood periods.

(10) The Department of the Army will furnish local interests with an Operation and Maintenance Manual for each completed project, or separate useful part thereof, to assist them in carrying out their obligations under this part.

(b) **Levees.** (1) **Maintenance.** The Superintendent shall provide at all times such maintenance as may be required to insure serviceability of the structures in time of flood. Measures shall be taken to promote the growth of sod, exterminate burrowing animals, and to provide for routine mowing of the grass and weeds, removal of wild growth and drift deposits, and repair of damage caused by erosion or other forces. Where practicable, measures shall be taken to retard bank erosion by planting of willows or other suitable growth on areas riverward of the levee. Periodic inspections shall be made by the Superintendent to insure that the above maintenance measures are being effectively carried out and, further, to be certain that:

(i) No unusual settlement, sloughing, or material loss of grade or levee cross section has taken place;

(ii) No caving has occurred on either the land side or the river side of the levee which might affect the stability of the levee section;

(iii) No seepage, saturated areas, or sand boils are occurring;

(iv) Toe drainage systems and pressure relief wells are in good working condition, and that such facilities are not becoming clogged;

(v) Drains through the levees and gates on said drains are in good working condition;

(vi) No revetment work or riprap has been displaced, washed out, or removed;

(vii) No action is being taken, such as burning grass and weeds during inappropriate seasons, which will retard or destroy the growth of sod;

(viii) Access roads to and on the levee are being properly maintained;

(ix) Cattle guards and gates are in good condition;

(x) Crown of levee is shaped so as to drain readily, and roadway thereon, if any, is well shaped and maintained;

(xi) There is no unauthorized grazing or vehicular traffic on the levees;

(xii) Encroachments are not being made on the levee right-of-way which might endanger the structure or hinder its proper and efficient functioning during times of emergency.

Such inspections shall be made immediately prior to the beginning of the flood season; immediately following each major high water period, and otherwise at intervals not exceeding 90 days, and such intermediate times as may be necessary to insure the best possible care of the levee. Immediate steps will be taken to correct dangerous conditions disclosed by such inspections. Regular maintenance repair measures shall be accomplished during the appropriate season as scheduled by the Superintendent.

(2) **Operation.** During flood periods the levee shall be patrolled continuously to locate possible sand boils or unusual wetness of the landward slope and to be certain that:

(i) There are no indications of slides or sloughs developing;

(ii) Wave wash or scouring action is not occurring;

(iii) No low reaches of levee exist which may be overtopped;

(iv) No other conditions exist which might endanger the structure.

Appropriate advance measures will be taken to insure the availability of adequate labor and materials to meet all

contingencies. Immediate steps will be taken to control any condition which endangers the levee and to repair the damaged section.

(c) **Flood walls.** (1) **Maintenance.** Periodic inspections shall be made by the Superintendent to be certain that:

(i) No seepage, saturated areas, or sand boils are occurring;

(ii) No undue settlement has occurred which affects the stability of the wall or its water tightness;

(iii) No trees exist, the roots of which might extend under the wall and offer accelerated seepage paths;

(iv) The concrete has not undergone cracking, chipping, or breaking to an extent which might affect the stability of the wall or its water tightness;

(v) There are no encroachments upon the right-of-way which might endanger the structure or hinder its functioning in time of flood;

(vi) Care is being exercised to prevent accumulation of trash and debris adjacent to walls, and to insure that no fires are being built near them;

(vii) No bank caving conditions exist riverward of the wall which might endanger its stability;

(viii) Toe drainage systems and pressure relief wells are in good working condition, and that such facilities are not becoming clogged.

Such inspections shall be made immediately prior to the beginning of the flood season, immediately following each major high water period, and otherwise at intervals not exceeding 90 days. Measures to eliminate encroachments and effect repairs found necessary by such inspections shall be undertaken immediately. All repairs shall be accomplished by methods acceptable in standard engineering practice.

(2) **Operation.** Continuous patrol of the wall shall be maintained during flood periods to locate possible leakage at monolith joints or seepage underneath the wall. Floating plant or boats will not be allowed to lie against or tie up to the wall. Should it become necessary during a flood emergency to pass anchor cables over the wall, adequate measures shall be taken to protect the concrete and construction joints. Immediate steps shall be taken to correct any condition which endangers the stability of the wall.

(d) **Drainage structures.** (1) **Maintenance.** Adequate measures shall be taken to insure that inlet and outlet channels are kept open and that trash, drift, or debris is not allowed to accumulate near drainage structures. Flap gates and manually operated gates and valves on drainage structures shall be examined, oiled, and trial operated at least once every 90 days. Where drainage structures are provided with stop log or other emergency closures, the condition of the equipment and its housing shall be inspected regularly and a trial installation of the emergency closure shall be made at least once each year. Periodic inspections shall be made by the Superintendent to be certain that:

(i) Pipes, gates, operating mechanism, riprap, and headwalls are in good condition;

(ii) Inlet and outlet channels are open;

(iii) Care is being exercised to prevent the accumulation of trash and debris near the structures and that no fires are being built near bituminous coated pipes;

(iv) Erosion is not occurring adjacent to the structure which might endanger its water tightness or stability.

Immediate steps will be taken to repair damage, replace missing or broken parts, or remedy adverse conditions disclosed by such inspections.

(2) **Operation.** Whenever high water conditions impend, all gates will be inspected a short time before water reaches the invert of the pipe and any object which might prevent closure of the gate shall be removed. Automatic gates shall be closely observed until it has been ascertained that they are securely closed. Manually operated gates and valves shall be closed as necessary to prevent inflow of flood water. All drainage structures

in levees shall be inspected frequently during floods to ascertain whether seepage is taking place along the lines of their contact with the embankment. Immediate steps shall be taken to correct any adverse condition.

(c) *Closure structures*—(1) *Maintenance*. Closure structures for traffic openings shall be inspected by the superintendent every 90 days to be certain that:

- (i) No parts are missing;
- (ii) Metal parts are adequately covered with paint;
- (iii) All movable parts are in satisfactory working order;
- (iv) Proper closure can be made promptly when necessary;
- (v) Sufficient materials are on hand for the erection of sand bag closures and that the location of such materials will be readily accessible in times of emergency.

Tools and parts shall not be removed for other use. Trial erections of one or more closure structures shall be made once each year, alternating the structures chosen so that each gate will be erected at least once in each 3-year period. Trial erection of all closure structures shall be made whenever a change is made in key operating personnel. Where railroad operation makes trial erection of a closure structure infeasible, rigorous inspection and drill of operating personnel may be substituted therefor. Trial erection of sand bag closures is not required. Closure materials will be carefully checked prior to and following flood periods, and damaged or missing parts shall be repaired or replaced immediately.

(2) *Operation*. Erection of each movable closure shall be started in sufficient time to permit completion before flood waters reach the top of the structure sill. Information regarding the proper method of erecting each individual closure structure, together with an estimate of the time required by an experienced crew to complete its erection will be given in the Operation and Maintenance Manual which will be furnished local interests upon completion of the project. Closure structures will be inspected frequently during flood periods to ascertain that no undue leakage is occurring and that drains provided to care for ordinary leakage are functioning properly. Boats or floating plant shall not be allowed to tie up to closure structures or to discharge passengers or cargo over them.

(f) *Pumping plants*—(1) *Maintenance*. Pumping plants shall be inspected by the Superintendent at intervals not to exceed 30 days during flood seasons and 90 days during off-flood seasons to insure that all equipment is in order for instant use. At regular intervals, proper measures shall be taken to provide for cleaning plant, buildings, and equipment, repainting as necessary, and lubricating all machinery. Adequate supplies of lubricants for all types of machines, fuel for gasoline or diesel powered equipment, and flash lights or lanterns for emergency lighting shall be kept on hand at all times. Telephone service shall be maintained at pumping plants. All equipment, including switch gear, transformers, motors, pumps, valves, and gates shall be trial operated and checked at

least once every 90 days. Megger tests of all insulation shall be made whenever wiring has been subjected to undue dampness and otherwise at intervals not to exceed one year. A record shall be kept showing the results of such tests. Wiring disclosed to be in an unsatisfactory condition by such tests shall be brought to a satisfactory condition or shall be promptly replaced. Diesel and gasoline engines shall be started at such intervals and allowed to run for such length of time as may be necessary to insure their serviceability in times of emergency. Only skilled electricians and mechanics shall be employed on tests and repairs. Operating personnel for the plant shall be present during tests. Any

equipment removed from the station for repair or replacement shall be returned or replaced as soon as practicable and shall be trial operated after reinstallation. Repairs requiring removal of equipment from the plant shall be made during off-flood seasons insofar as practicable.

(2) *Operation*. Competent operators shall be on duty at pumping plants whenever it appears that necessity for pump operation is imminent. The operator shall thoroughly inspect, trial operate, and place in readiness all plant equipment. The operator shall be familiar with the equipment manufacturers' instructions and drawings and with the "Operating Instructions" for each station. The equipment shall be operated in accordance with the above-mentioned "Operating Instructions" and care shall be exercised that proper lubrication is being supplied all equipment, and that no overheating, undue vibration or noise is occurring. Immediately upon final recession of flood waters, the pumping station shall be thoroughly cleaned, pump house pumps flushed, and equipment thoroughly inspected, oiled and greased. A record or log of pumping plant operation shall be kept for each station, a copy of which shall be furnished the District Engineer following each flood.

(g) *Channels and floodways*—(1) *Maintenance*. Periodic inspections of improved channels and floodways shall be made by the Superintendent to be certain that:

- (i) The channel or floodway is clear of debris, weeds, and wild growth;
- (ii) The channel or floodway is not being restricted by the depositing of waste materials, building of unauthorized structures or other encroachments;
- (iii) The capacity of the channel or floodway is not being reduced by the formation of shoals;
- (iv) Banks are not being damaged by rain or wave wash, and that no sloughing of banks has occurred;
- (v) Riprap sections and deflection dikes and walls are in good condition;
- (vi) Approach and egress channels adjacent to the improved channel or floodway are sufficiently clear of obstructions and debris to permit proper functioning of the project works.

Such inspections shall be made prior to the beginning of the flood season and otherwise at intervals not to exceed 90 days. Immediate steps will be taken to remedy any adverse conditions disclosed by such inspections. Measures will be taken by the Superintendent to promote the growth of grass on bank slopes and earth deflection dikes. The Superintendent shall provide for periodic repair and cleaning of debris basins, check dams, and related structures as may be necessary.

(2) *Operation*. Both banks of the channel shall be patrolled during periods of high water, and measures shall be taken to protect those reaches being attacked by the current or by wave wash. Appropriate measures shall be taken to prevent the formation of jams of ice or debris. Large objects which become lodged against the bank shall be removed. The improved channel or floodway shall be thoroughly inspected immediately following each major high water period. As soon as practicable thereafter, all snags and other debris shall be removed and all damage to banks, riprap, deflection dikes and walls, drainage outlets, or other flood control structures repaired.

(h) *Miscellaneous facilities*—(1) *Maintenance*. Miscellaneous structures and facilities constructed as a part of the protective works and other structures and facilities which function as a part of, or affect the efficient functioning of the protective works, shall be periodically inspected by the Superintendent and appropriate maintenance measures taken. Damaged or unserviceable parts shall be repaired or replaced without delay. Areas used for ponding in connection with pumping plants or for temporary storage of interior run-off during flood


periods shall not be allowed to become filled with silt, debris, or dumped material. The Superintendent shall take proper steps to prevent restriction of bridge openings and, where practicable, shall provide for temporary raising during floods of bridges which restrict channel capacities during high flows.

(2) *Operation*. Miscellaneous facilities shall be operated to prevent or reduce flooding during periods of high water. Those facilities constructed as a part of the protective works shall not be used for purposes other than flood protection without approval of the District Engineer unless designed therefor.


(Doc. 3, 40 Stat. 1571, as amended; 23 U.S.C. 701a) [S.F.S. 2999, Aug. 17, 1944; 9 F.R. 11920, Aug. 23, 1944]



Stream	Project Design Flows	Cubic Feet Per Sec
Big Chico Creek (upper)		16,000
Diversion Channel (D.S. Div. Weir)		8,500
South Sycamore Creek (D.S. div. channel)		8,800
Sycamore Creek (Sta 365+39 - 447+50)		11,000
Sycamore Creek (Sta 449+79 - 499+65)		10,000
Mud Creek (Sta 222+90 - 361+25)		15,000
Mud Creek (Sta 206+02 - 222+90)		13,000
Mud Creek (Sta 9+56 - 206+02)		13,000
Big Chico Creek (lower) (D.S. mud Cr.)		15,000
Lindo Channel (D.S. Diversion Weir)		14,500
Mud Creek (extended) - D.S. Sycamore Cr.		5,500
Sheep Hollow		1,400
Dry Creek		500
North Sycamore Creek		1,800
Big Chico Creek-Unimproved (Mud Creek to Diversion Works)		1,500
Sandy Gulch - Unimproved (Lindo Channel) - D.S. Div. Weir.		6,000

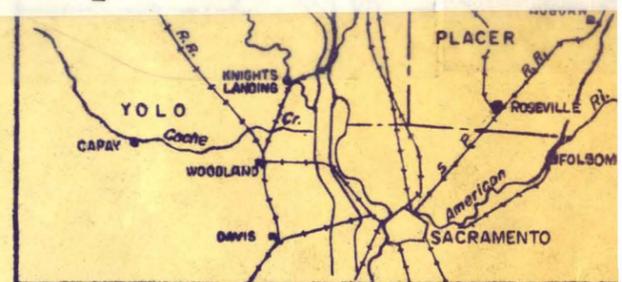


VICINITY MAP



LEGEND

- EXTENT OF LEVEES - - - - -
- EXTENT OF CHANNEL - - - - - (IMPROVED)
- EXTENT OF CHANNEL - - - - - (UNIMPROVED)

LOCATION MAP
 SACRAMENTO RIVER AND MAJOR AND MINOR TRIBUTARIES PROJECT, CALIFORNIA
 CHICO & MUD CREEKS AND SANDY GULCH
 SACRAMENTO RIVER TO HIGH GROUND

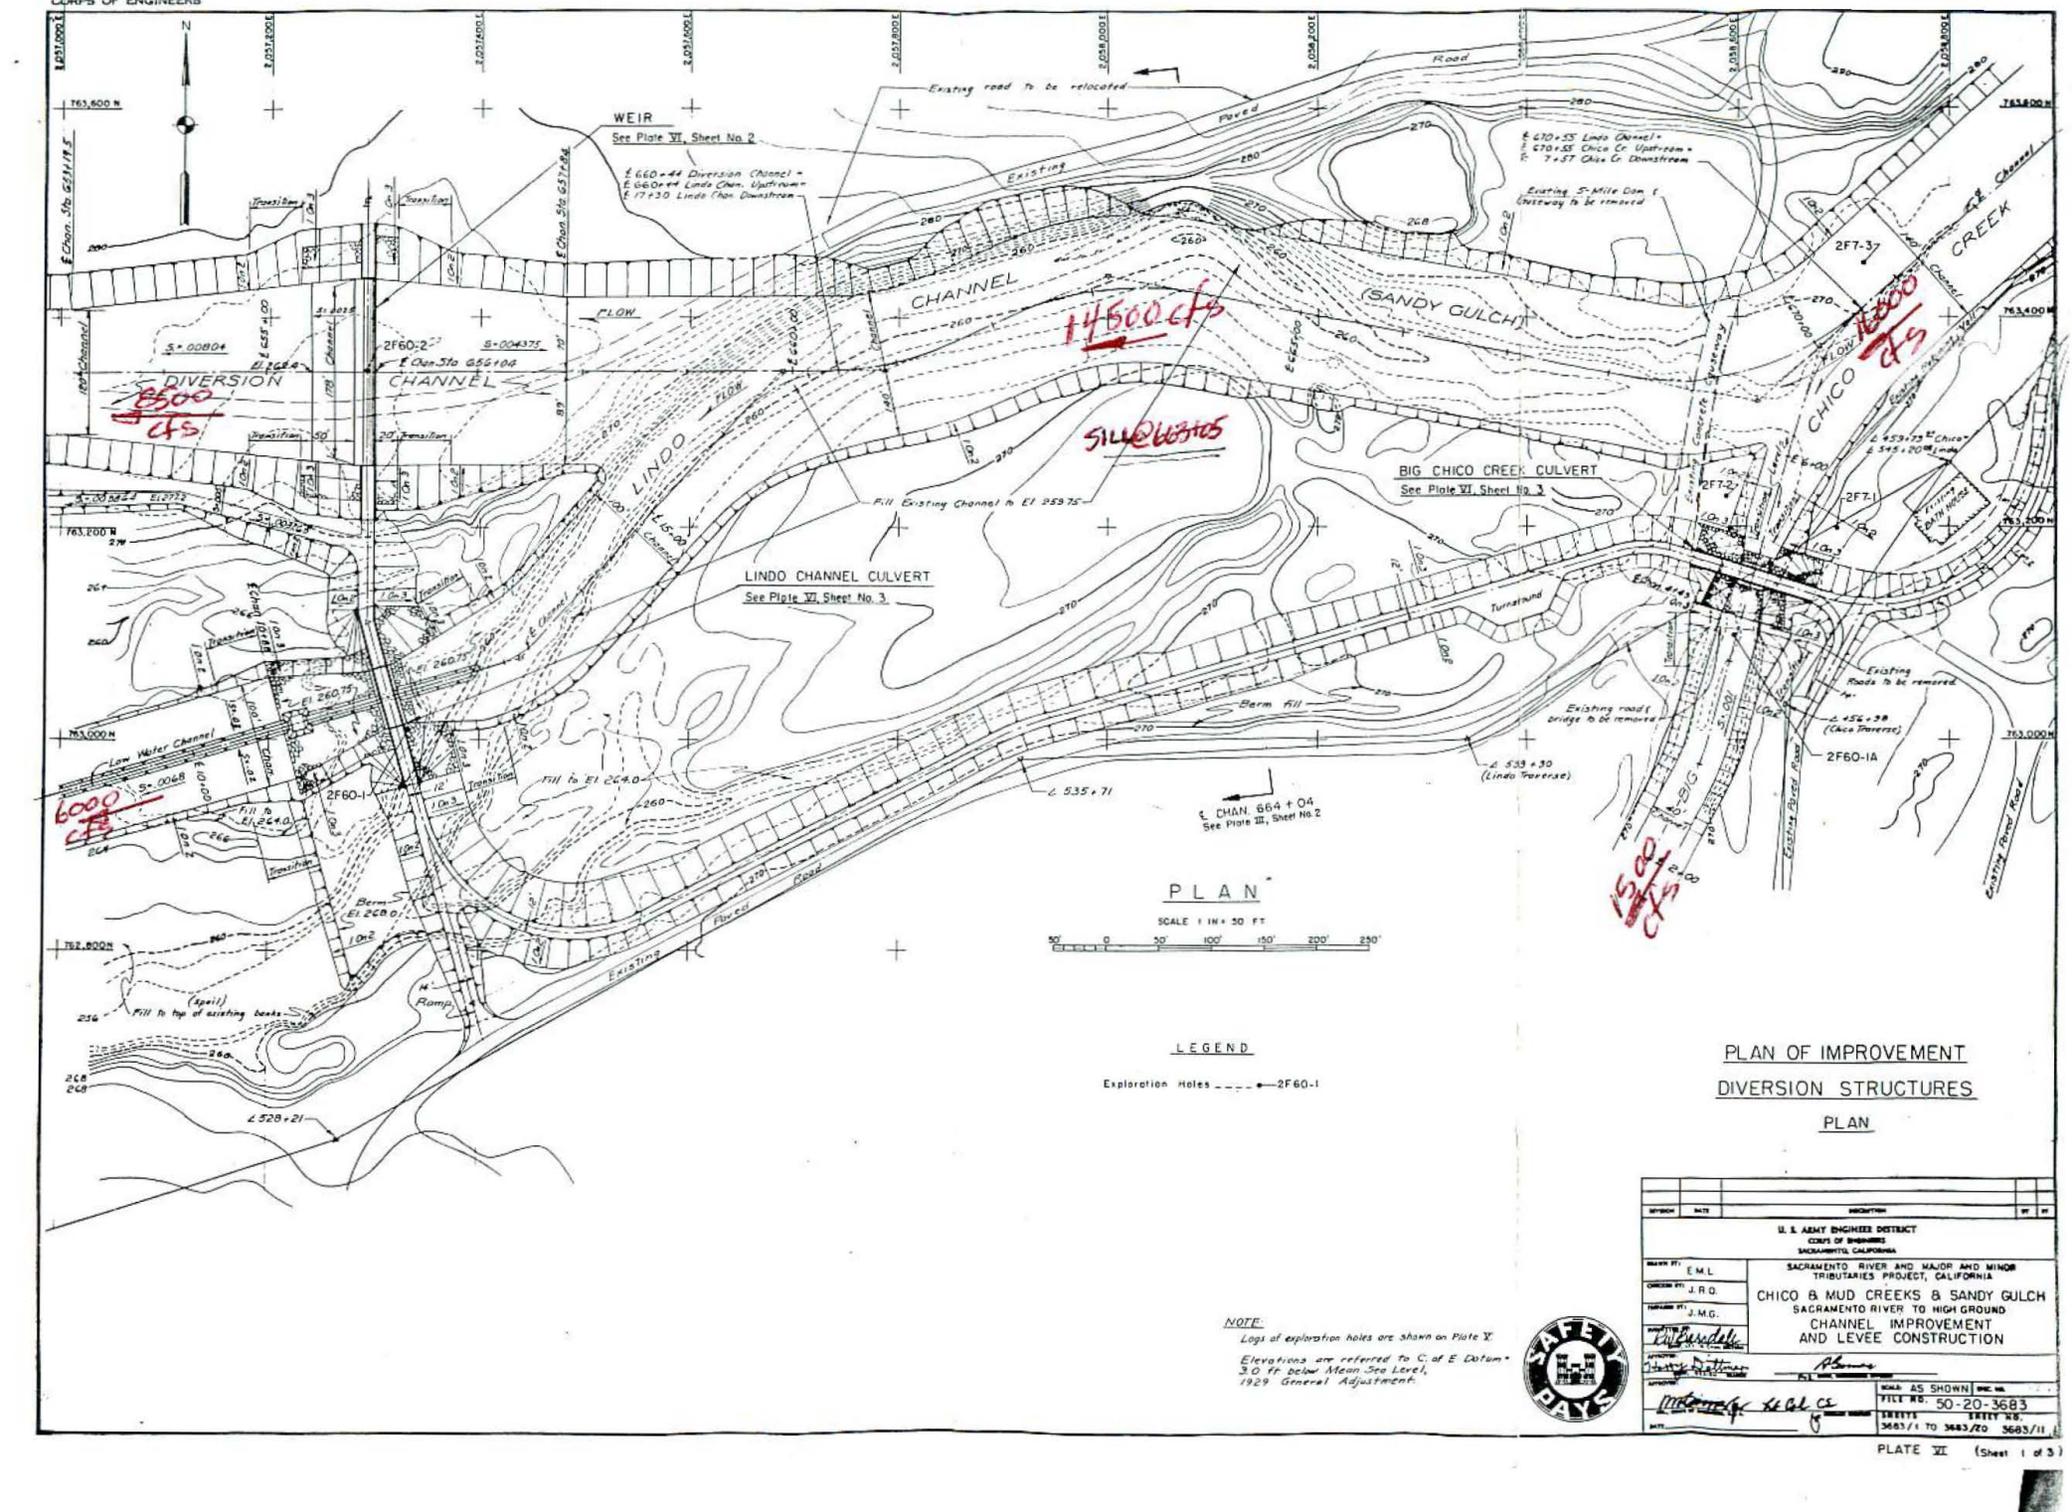

8500 cfs

14500 cfs


SILVERBISS

14500 cfs

1500 cfs

PLAN

SCALE 1 IN = 50 FT



LEGEND

Exploration Holes --- 2F60-1

NOTE
 Logs of exploration holes are shown on Plate V.
 Elevations are referred to C. of E Datum
 3.0 ft below Mean Sea Level,
 1929 General Adjustment.

**PLAN OF IMPROVEMENT
 DIVERSION STRUCTURES
 PLAN**

NO.	DATE	DESCRIPTION	BY	CHK
U. S. ARMY ENGINEER DISTRICT CORPS OF ENGINEERS SACRAMENTO, CALIFORNIA				
DESIGN BY:	E.M.L.	SACRAMENTO RIVER AND MAJOR AND MINOR TRIBUTARIES PROJECT, CALIFORNIA		
CHECKED BY:	J.R.G.	CHICO & MUD CREEKS & SANDY GULCH SACRAMENTO RIVER TO HIGH GROUND CHANNEL IMPROVEMENT AND LEVEE CONSTRUCTION		
APPROVED BY:	J.M.G.			
DATE:	10/1/50			
BY:	<i>[Signature]</i>			
CHKD BY:	<i>[Signature]</i>			
DATE:	10/1/50			
WORK AS SHOWN PER NO. 50-20-3683 SHEETS 1 TO 3683/20 3683/11		PLATE VII (Sheet 1 of 3)		



EXHIBIT B

"AS-CONSTRUCTED"
DRAWINGS

(See separate folder for the following drawings.)

<u>File No.</u>	<u>Title</u>
50-4-3684	Chico & Mud Creeks & Sandy Gulch - Sacramento River to Sacramento Avenue, in 6 sheets.
50-4-3685	Chico & Mud Creeks & Sandy Gulch - Sacramento Avenue to High Ground, in 47 sheets.


EXHIBIT B

<u>File No.</u>	<u>Title</u>
50-4-4085	Project modifications at various locations, in 13 sheets. ✓

EXHIBIT C

PLATES OF SUGGESTED FLOOD FIGHTING METHODS

EXHIBIT C


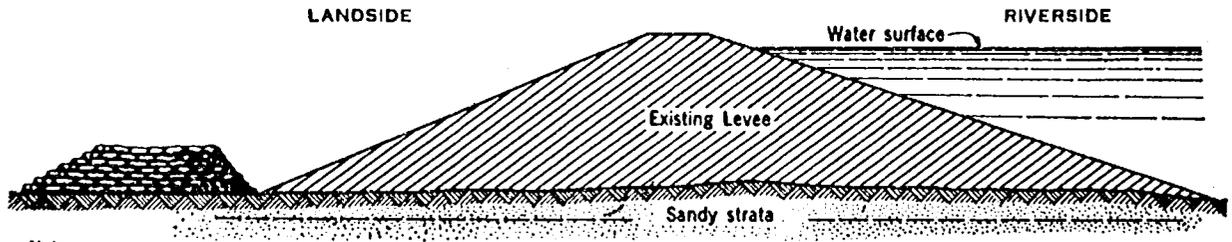


Note:
 Bottom width to be no less than 1½ times height.
 Be sure to clear sand discharge.
 Tie into levee if boil is near toe.

ELEVATION



SECTION A-A

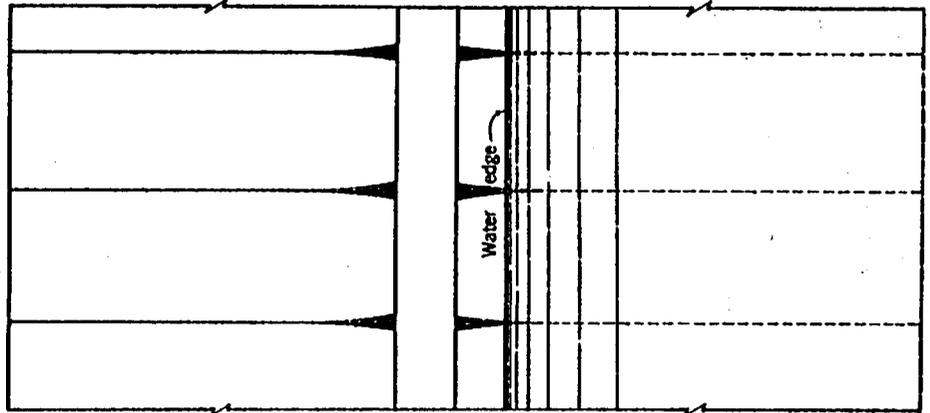


PLAN

Note:
 Do not sack boil which does not put out material.
 Height of sack loop or ring should be only sufficient to create enough head to slow down flow through boil so that no more material is displaced and boil runs clear.
 Never attempt to completely stop flow through boil.

SACRAMENTO RIVER
 AND MAJOR AND MINOR TRIBUTARIES
 FLOOD CONTROL PROJECT


CONTROL OF SAND BOILS

U.S. ENGINEER OFFICE, SACRAMENTO, CALIF.

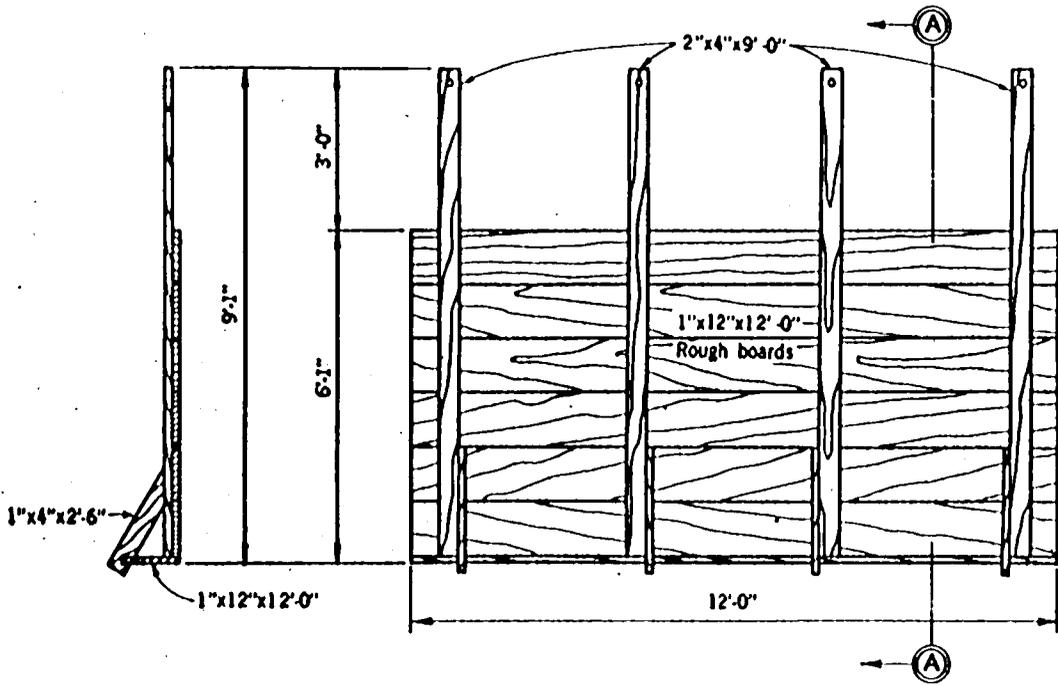

SECTION A-A

PLAN

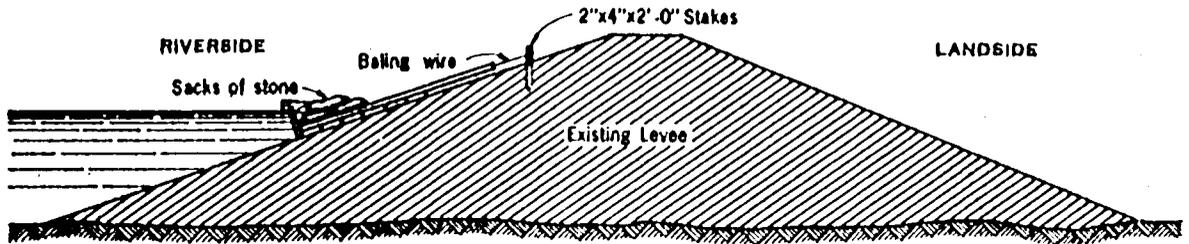


SECTION

BILL OF MATERIAL FOR 100 FEET	
LUMBER	
56 pieces	1" x 12" x 12'-0"
32 pieces	1" x 4" x 2'-6"
32 pieces	2" x 4" x 9'-0"
• 32 pieces	2" x 4" x 2'-0"
•	(Sharpened)
WIRE	
200'	baling wire
NAILS	
4)	lbs. 8d nails


SACRAMENTO RIVER
AND MAJOR AND MINOR TRIBUTARIES
FLOOD CONTROL PROJECT

MOVABLE
WAVE WASH PROTECTION

U. S. ENGINEER OFFICE, SACRAMENTO, CALIF.

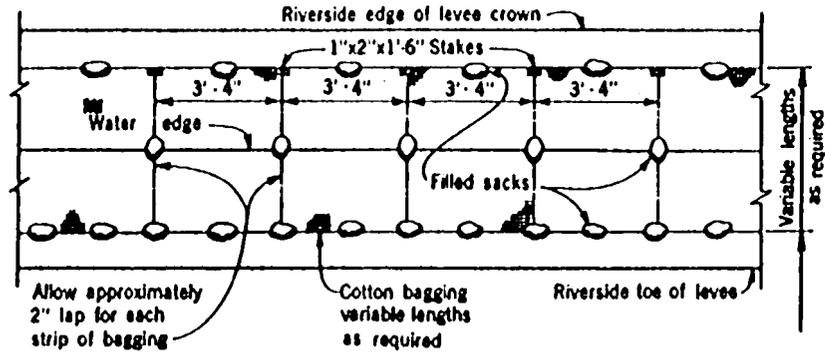

PLAN

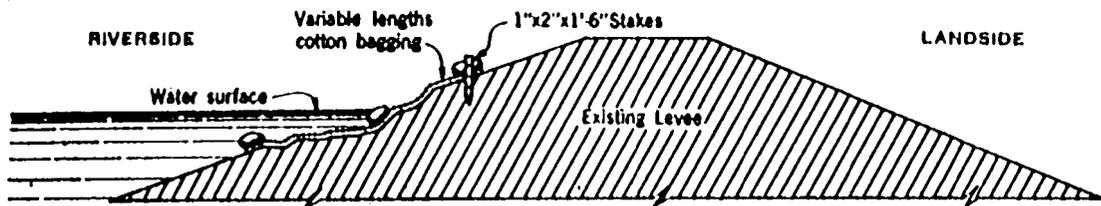

SECTION

Note:


Lay lengths as required of cotton bagging approximately parallel with levee slope and across damaged section. Weight top and edges of bagging with filled sacks as shown above. The filled sacks should be wired or tied to each strip before laying in place. Stake the corners of each strip above water surface. Where cotton bagging is not available burlap secking may be substituted.

MATERIAL REQUIRED FOR 100 LINEAR FEET OF LEVEE
LUMBER
• 30 Stakes 1"x2"x1'-6"
• (Sharpened)
SANDBAGS
120 sand bags
Cotton bagging as required

SACRAMENTO RIVER
AND MAJOR AND MINOR TRIBUTARIES
FLOOD CONTROL PROJECT

WAVE WASH PROTECTION

U.S. ENGINEER OFFICE, SACRAMENTO, CALIF.

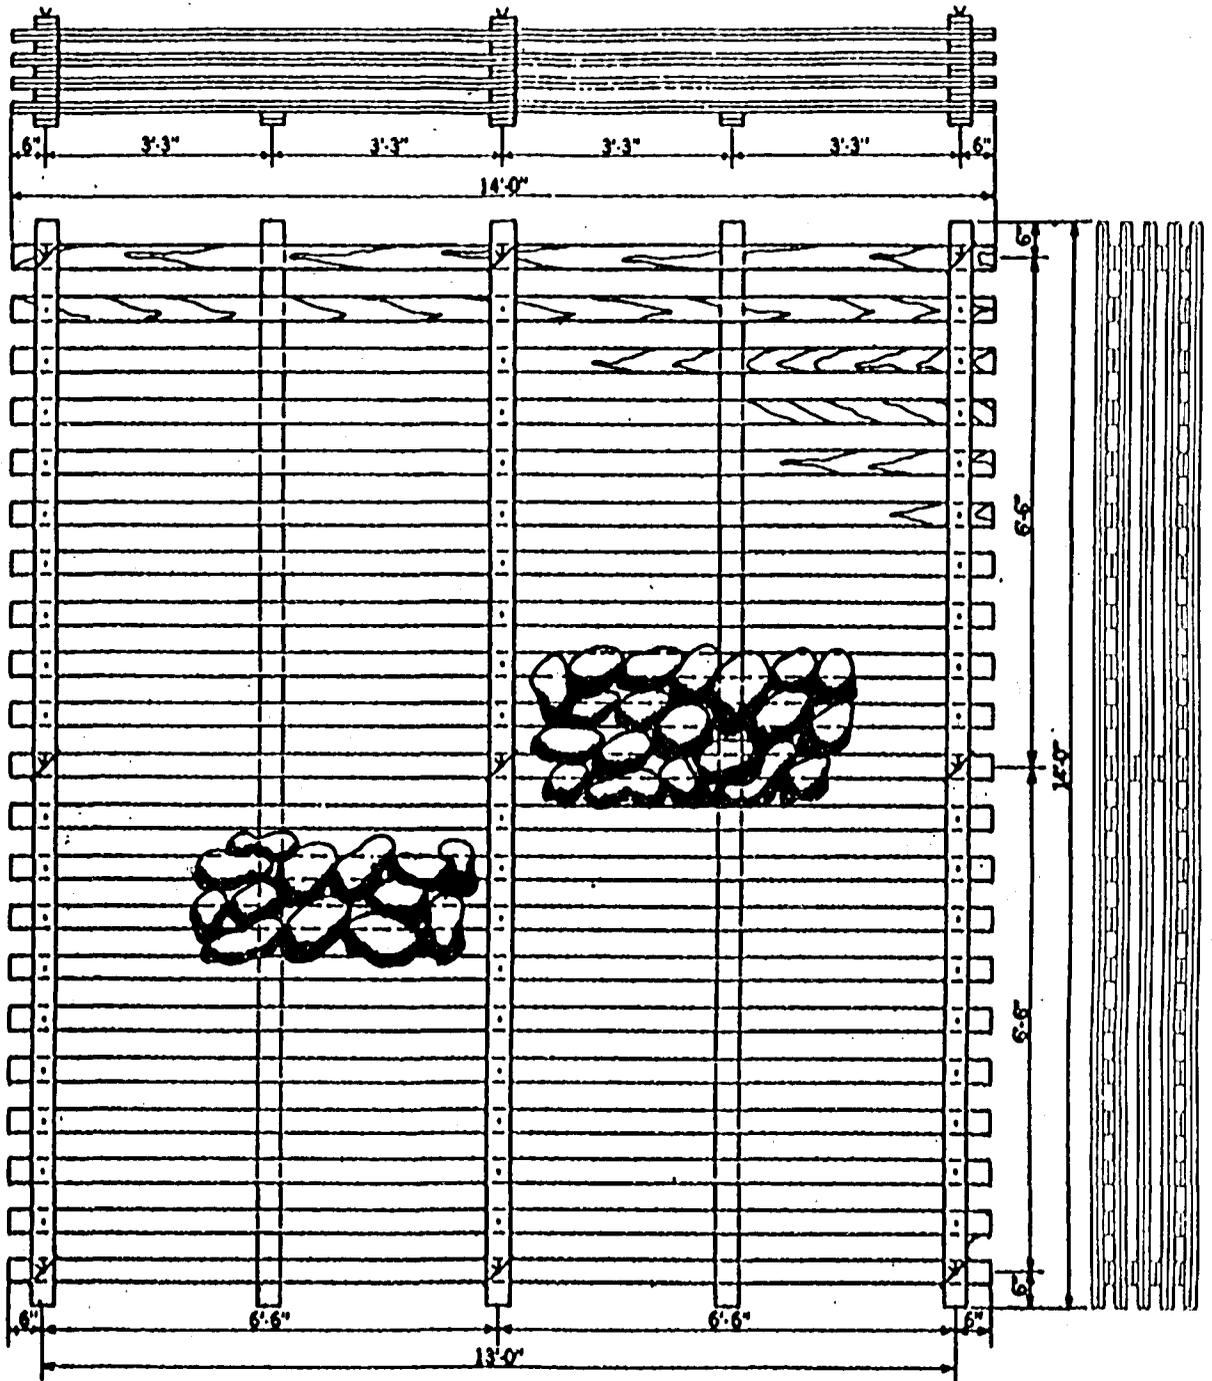

Note:



Cribs constructed of double thickness of 1"x4"x14'-0" lumber. Nail all intersections with 1-20d nail. Each intersection of walls securely fastened by a loop of No. 9 wire, tightly twisted.

BILL OF MATERIAL FOR ONE CRIB 13'-0"
LUMBER
130 pieces 1"x4"x14'-0"
WIRE
30' No. 9 wire
NAILS
12 1/2 lbs. 20d nails

**SACRAMENTO RIVER
AND MAJOR AND MINOR TRIBUTARIES
FLOOD CONTROL PROJECT**

CAVING BANK PROTECTION

U. S. ENGINEER OFFICE, SACRAMENTO, CALIF.

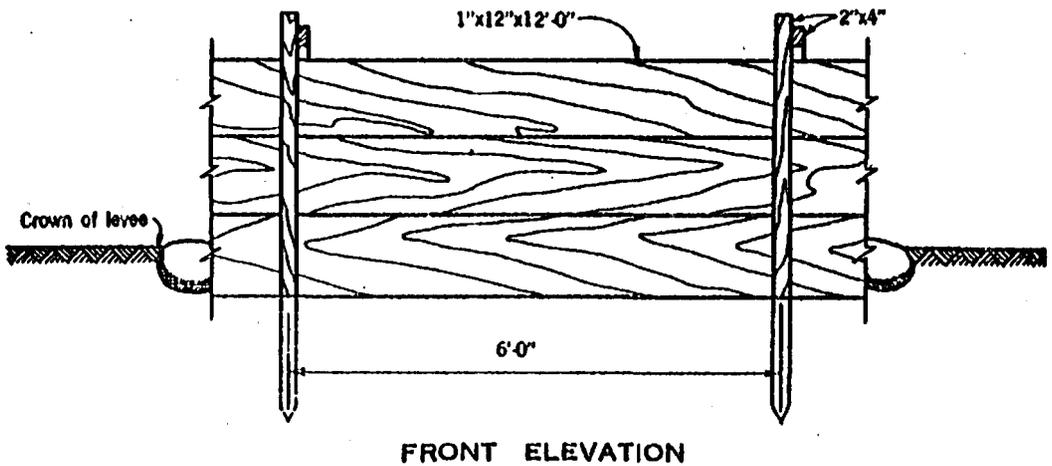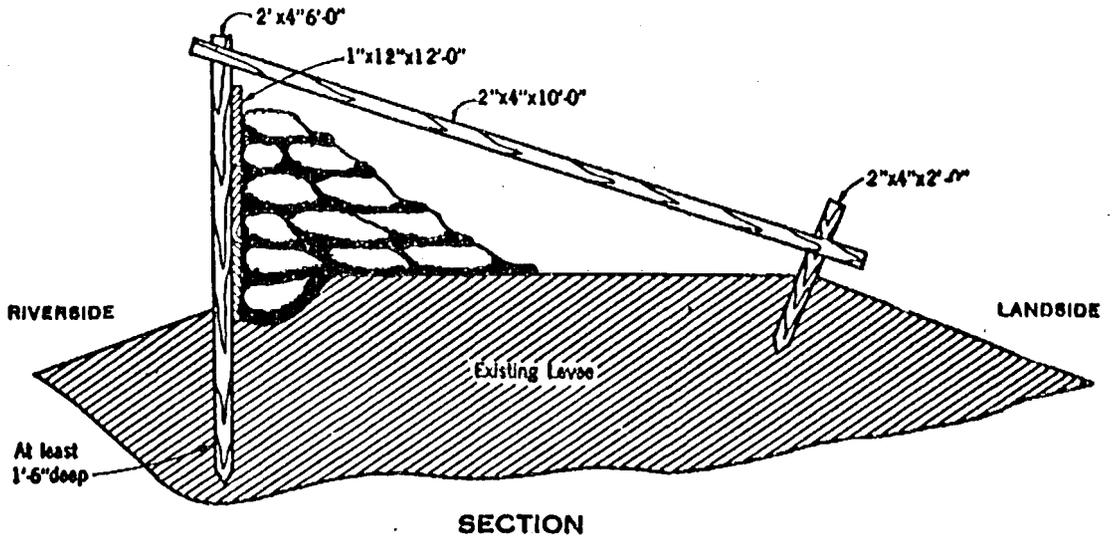

BILL OF MATERIAL FOR 100 LINEAR FEET OF LEVEE	
LUMBER	
25 pieces	1"x12"x12'-0"
17 pieces	2"x4"x10'-0"
• 17 pieces	2"x4"x6'-0"
• 17 pieces	2"x4"x2'-0"
•	(Sharpened)
NAILS	
1 lb.	8d nails
2 lbs.	16d nails
SANDBAGS	
1100	bags

SACRAMENTO RIVER
AND MAJOR AND MINOR TRIBUTARIES
FLOOD CONTROL PROJECT

LUMBER AND SACK TOPPING


U. S. ENGINEER OFFICE, SACRAMENTO, CALIF.

LEVEE CONSTRUCTION

SANDBAGGING USED TO PREVENT OVERTOPPING OF EXISTING LEVEES AND FOR RETAINING FLOOD WATERS WHERE NO BACK-UP MATERIAL IS AVAILABLE.

INSTRUCTIONS:


1. FILL SANDBAGS 1/2 TO 2/3 FULL BUT LEAVE ENOUGH FLAP TO TURN UNDER. DO NOT TIE. LEAVE ENDS OPEN.
2. FOR HEIGHTS OF 1 FOOT AND LESS, LAY 3 SINGLE COURSES WITH BAGS LENGTHWISE AS SHOWN IN SKETCH "A" BELOW.
3. FOR HEIGHTS GREATER THAN 1 FOOT, PLACE AS INDICATED IN SKETCH "B" BELOW.
4. WHEN BAGS ARE PLACED FLATTEN OUT AND FILL VOIDS BY MASHING BAGS WITH FEET AND VIGOROUSLY TRAMP EACH COURSE OF THE LEVEE SECTION. THIS IS AN EXTREMELY IMPORTANT OPERATION FOR PROVIDING A LEVEE WHICH WILL BE AS IMPERVIOUS TO WATER AS POSSIBLE AND TO INSURE STABILITY OF SECTION. LOOSELY PLACED SANDBAGS IMPROPERLY KEYS TOGETHER MAY RESULT IN FAILURE AND CAUSE SERIOUS DAMAGE.

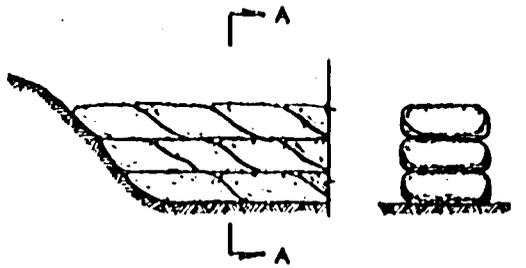

ELEVATION

SECTION A-A

SKETCH A

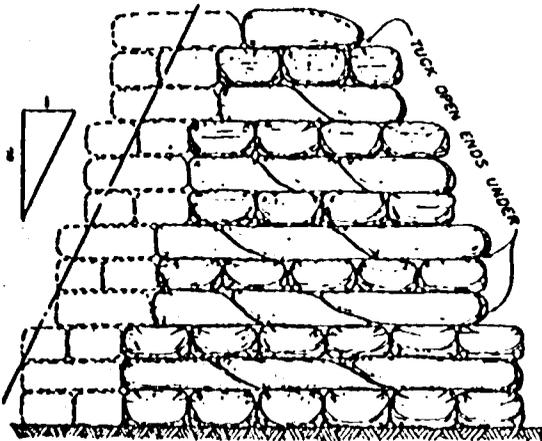

LEVEE SECTION

FOR HEIGHTS IN EXCESS OF THE ABOVE (APPROX 3'-6") HOLD SAME BATTER AND BUILD ON THE SIDE AS INDICATED BY DASHED LINES ABOVE. ALTERNATE HEADER COURSES (BAGS PLACED CROSSWISE) AND STRETCHER COURSES (BAGS PLACED LENGTHWISE).

SKETCH B

ESTIMATING DATA:


1. AVERAGE WEIGHT OF EACH FILLED SANDBAG, APPROX. 50 LBS.
2. APPROXIMATELY 1000 SANDBAGS ARE REQUIRED FOR EACH 100 SQ. FT. OF SURFACE (HEIGHT MULTIPLIED BY DISTANCE).

REVETMENTS


USED FOR EMERGENCY BANK PROTECTION TO PREVENT UNDER CUTTING AND CONTROL OF COURSE OF FLOOD CHANNELS.

INSTRUCTIONS:

1. FILL SANDBAGS 2/3 FULL AND TIE OPEN END.
2. TUCK IN BOTTOM CORNERS OF BAG AFTER FILLING.
3. PLACE BAGS PERPENDICULAR TO SLOPE.
4. LAY STRETCHER AND HEADER COURSES WITH CHOKE AND SICE BEAMS IN; THUS:-

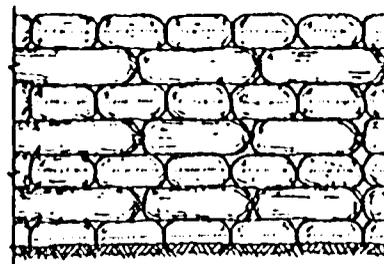

ELEVATION

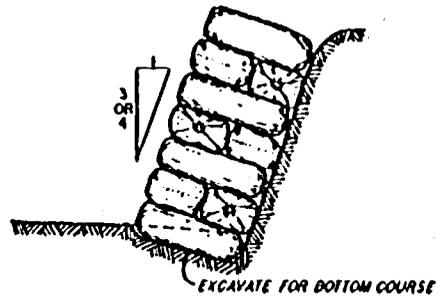

SECTION

ESTIMATING DATA:


1. AVERAGE WEIGHT OF EACH FILLED SANDBAG APPROXIMATELY 55 LBS.
2. APPROXIMATELY 320 SANDBAGS ARE REQUIRED FOR EACH 100 SQ. FT. OF SURFACE TO BE REVETED.

FILL MATERIAL:


THE IDEAL MATERIAL FOR FILLING SAND BAGS IS A FINE SAND OR COARSE SILT. AVOID, AS MUCH AS POSSIBLE, THE USE OF COARSE GRAVEL AND HEAVY CLAYS.

**SACRAMENTO RIVER
AND MAJOR AND MINOR TRIBUTARIES
FLOOD CONTROL PROJECT
INSTRUCTIONS FOR
PLACING SANDBAGS**


U. S. ENGINEER OFFICE, SACRAMENTO, CALIF.

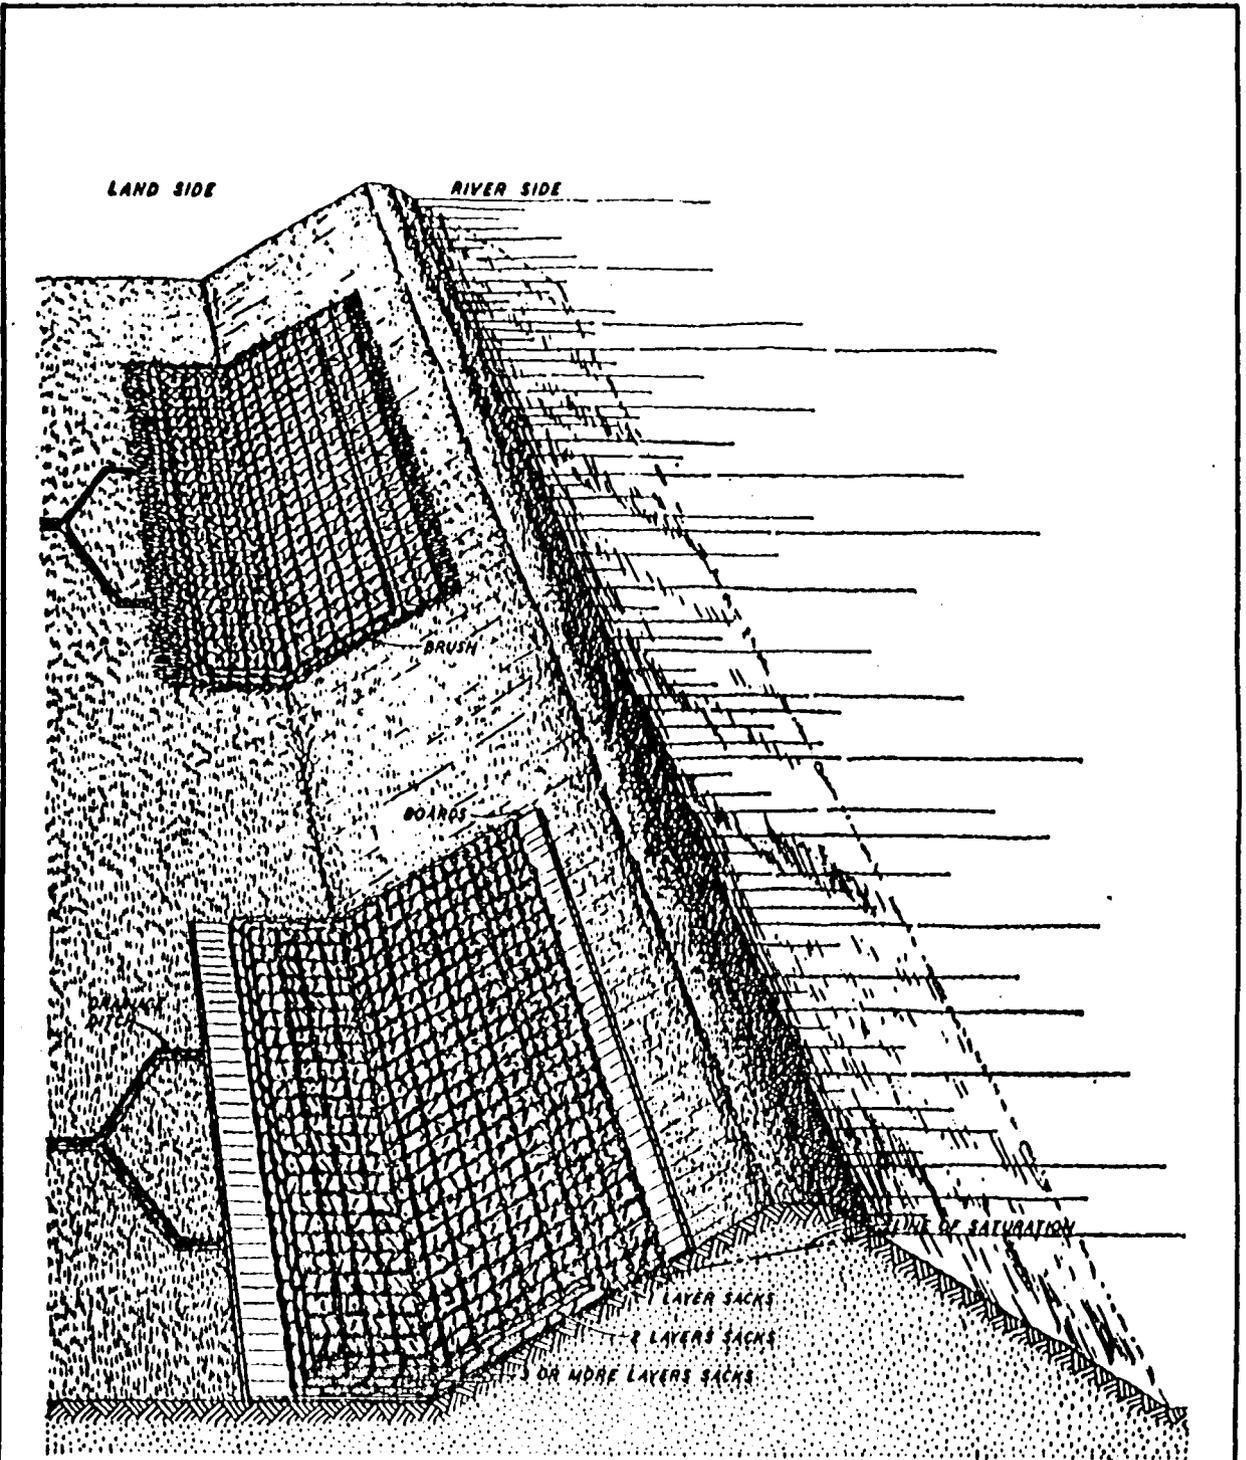

SACRAMENTO RIVER
AND MAJOR AND MINOR TRIBUTARIES
FLOOD CONTROL PROJECT
BRUSHING AND SACKING
THE LANDSIDE SLOPE
U.S. CORPS OF ENGINEERS, SACRAMENTO, CALIF.

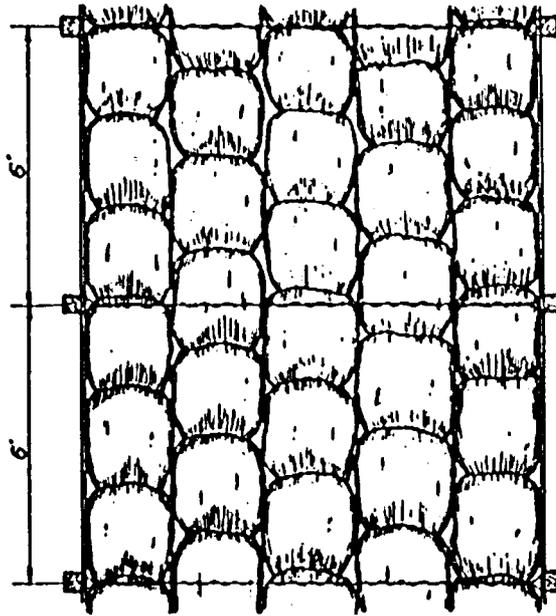

PLAN

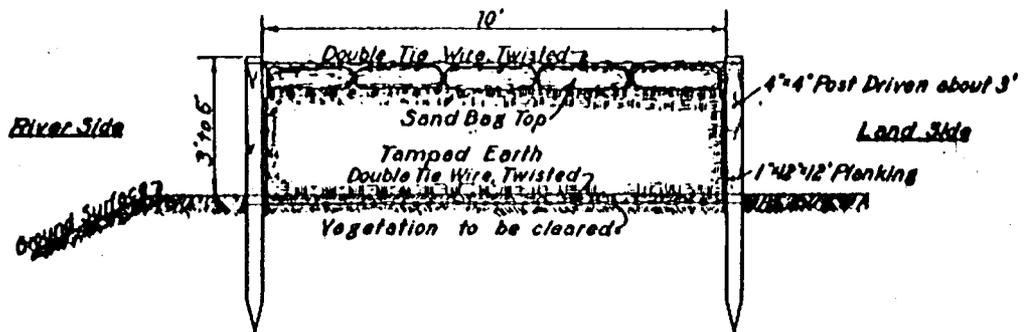

END ELEVATION


MATERIAL REQUIRED FOR 100 LINEAR FEET OF LEVEE		
4 FT HIGH	5 FT HIGH	6 FT HIGH
34 pieces 4"x4"x7' (sharpened) 1122	34 pieces 4"x4"x8' (sharpened) 1371	34 pieces 4"x4"x9' (sharpened) 1608
67 pieces 1"x12"x12' board feet	84 pieces 1"x12"x12' board feet	100 pieces 1"x12"x12' board feet
25 lbs wire #12 gage	25 lbs wire #12 gage	25 lbs wire #12 gage
13 lbs 10d nails	15 lbs 10d nails	17 lbs 10d nails
600 sand bags	600 sand bags	600 sand bags
148 cu. yds. earth	185 cu. yds. earth	222 cu. yds. earth

**SACRAMENTO RIVER
AND MAJOR AND MINOR TRIBUTARIES**


FLOOD CONTROL PROJECT

**3-6 FT. MUD BOX LEVEE
CONSTRUCTION DETAILS**

U.S. CORPS OF ENGINEERS, SACRAMENTO, CALIF.

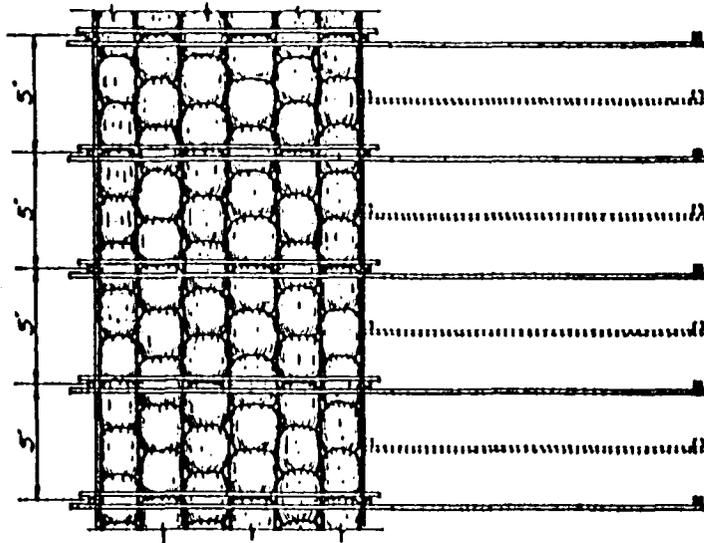

PLAN

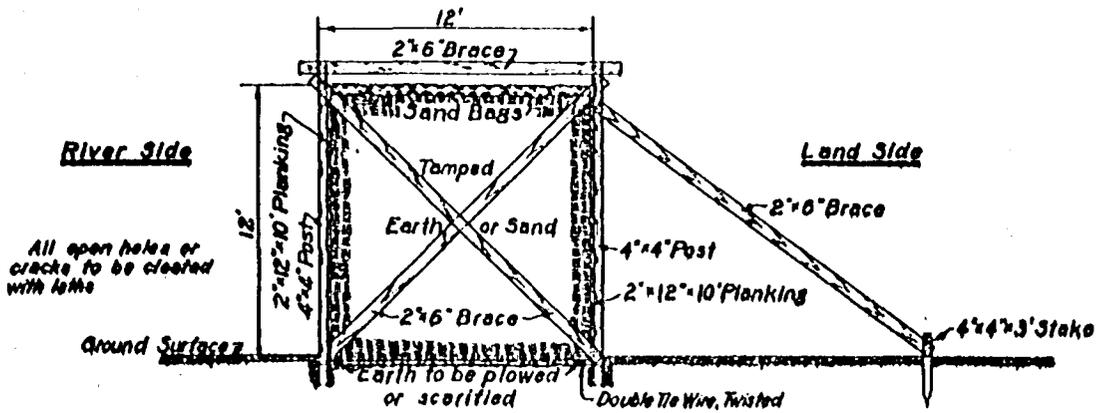


END ELEVATION

MATERIAL REQUIRED FOR 100 LINEAR FEET OF LEVEE			
LUMBER	SAND BAGS	NAILS	EARTH or SAND
40 Posts 4"x4"x14'	700	120 lbs-20d	534 cu yds
240 Planks 2"x12"x10'		4 lbs-3d fine	
20 Braces 2"x6"x14'		WIRE	
60 Braces 2"x6"x10'		20 lbs #2 gage	
#20 Stakes 4"x4"x3'			
5 bundles laths			
Total Lumber 6987 board feet			

ADDITIONAL MATERIAL FOR BRACING BACK SIDE IN BETWEEN BENTS			
LUMBER	SAND BAGS	NAILS	EARTH or SAND
20 Posts 4"x4"x14'		6 lbs-20d	
20 Braces 2"x6"x10'			
#20 Stakes 4"x4"x3'			
Total Lumber 613 board feet			

Sharpened

SACRAMENTO RIVER AND
 MAJOR AND MINOR TRIBUTARIES
 FLOOD CONTROL PROJECT
 MUDBOX BULKHEAD LEVEE
 CONSTRUCTION DETAILS
 U.S. CORPS OF ENGINEERS, SACRAMENTO, CALIF.

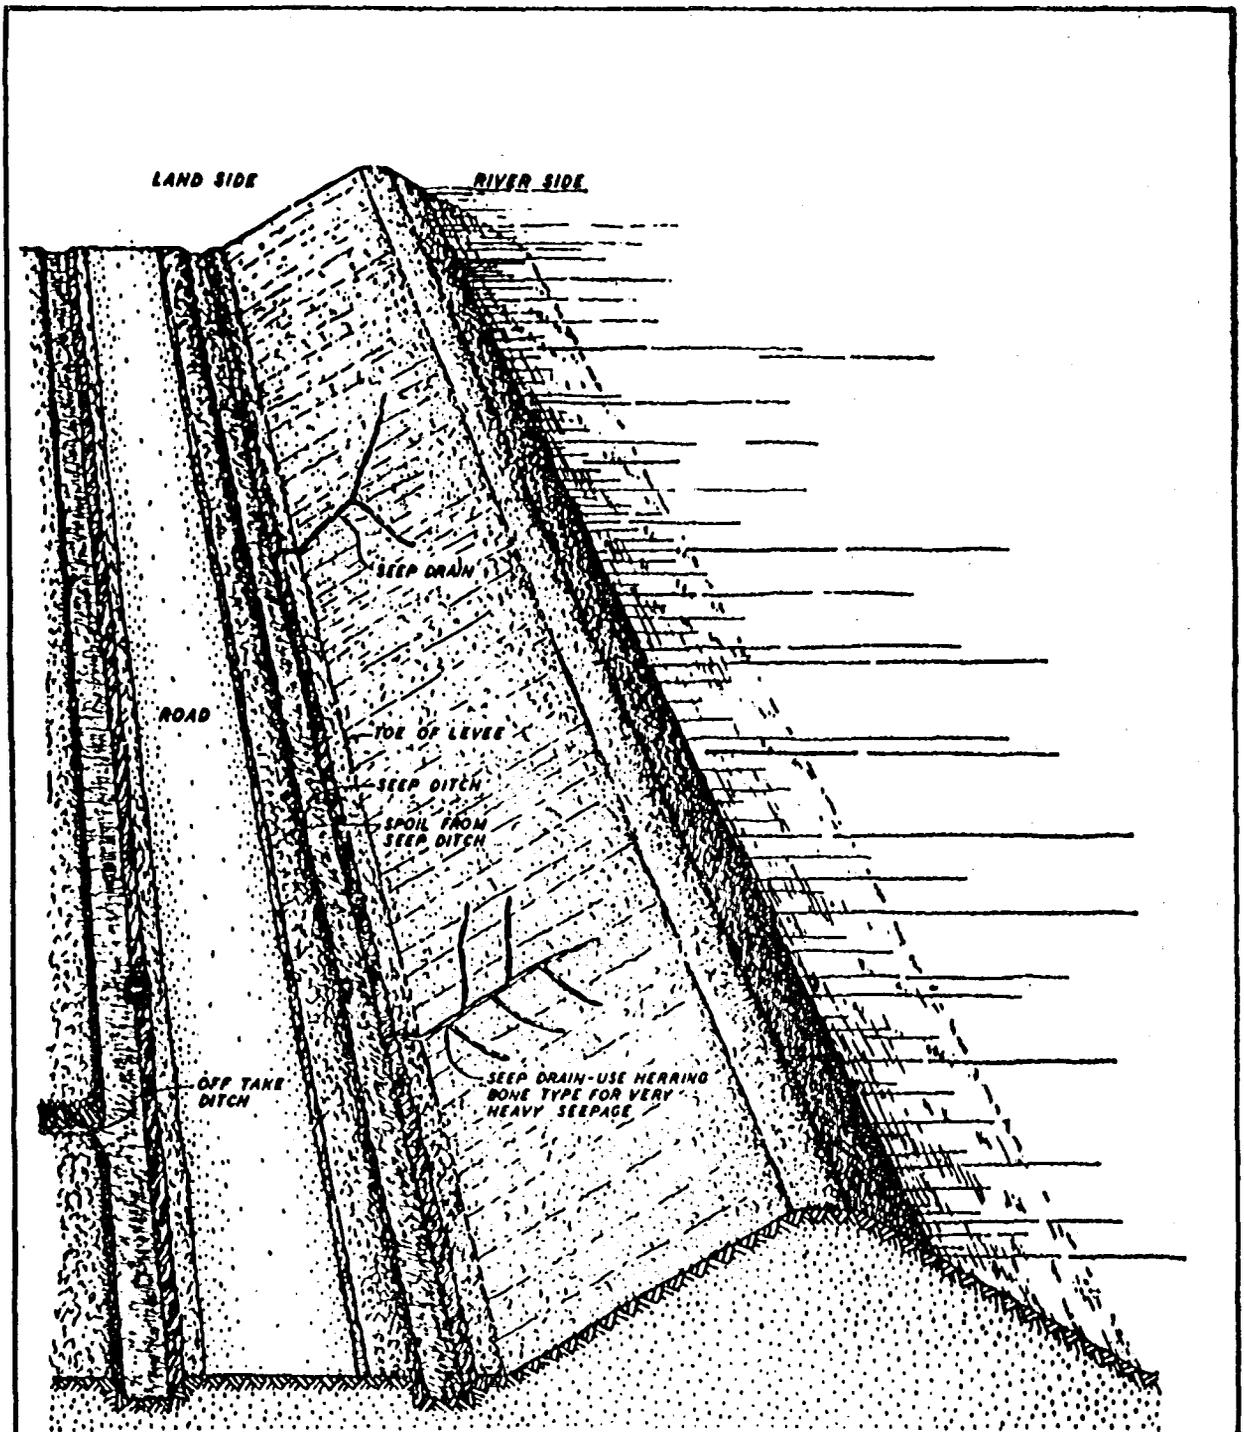

SACRAMENTO RIVER
AND MAJOR AND MINOR TRIBUTARIES
FLOOD CONTROL PROJECT
METHOD OF
DRAINING LEVEE SLOPE

U.S. CORPS OF ENGINEERS, SACRAMENTO, CALIF.

EXHIBIT D

SUGGESTED SEMI-ANNUAL REPORT FORM

EXHIBIT D

TO: The District Engineer
U. S. Army Engineer
District Sacramento
650 Capitol Avenue
Sacramento, California

(1 May 19__)
(1 Nov 19__)

Dear Sir:

The semi-annual report for the period (1 May 19__ to 31 October 19__) (1 November 19__ to 30 April 19__) Chico and Mud Creeks and Sandy Gulch Project levees and channels, San Joaquin County, is as follows:

a. The physical condition of the protective works is indicated by the inspector's report, copies of which are inclosed, and may be summarized as follows:

(Superintendent's summary of conditions)

It is our intention to perform the following maintenance work in order to repair or correct the conditions indicated:

(Outline the anticipated maintenance operations for the following 6 months.)

b. During this report period, major high water periods (water surface reached or exceeded a reading of 12.0 on the Big Chico Creek gage, 10.0 on the Diversion Channel gage, or 15.0 on the Mud Creek gage) occurred on the following dates:

<u>Dates</u>	<u>Maximum Elevation</u>
_____	_____
_____	_____
_____	_____

Comments on the behavior of the protective works during such high water periods are as follows:

(Superintendent's log of flood observations)

During the high water stages when the water level reaches a height of _____, on the gage or excess thereof (dates) _____, it was necessary to organize and carry out flood operations as follows:

(See Maintenance Manual _____.)

c. The inspections have indicated (no) or (the following) encroachments or trespasses upon the project right-of-way.

d. (No) (_____) permits have been issued for (the following improvements or construction within the project right-of-way.

Executed copies of the permit documents issued are transmitted for your files.

e. The status of maintenance measures, indicated in the previous semi-annual report as being required or as suggested by the representatives of the District Engineer, is as follows:

(Statement of maintenance operations, item by item with percent completion.)

f. The fiscal statement of the Superintendent's operations for the current period is as follows:

	<u>Labor</u>	<u>Material</u>	<u>Equipment</u>	<u>Overhead</u>	<u>Total</u>
1. Inspection					
2. Maintenance					
3. Flood Fighting Operations					
TOTAL					

Respectfully submitted,

Superintendent of Works

EXHIBIT E

SUGGESTED CHECK LISTS OF LEVEES, CHANNELS AND STRUCTURES

For definition of "flood" or "high water period" see paragraph 1-06 of this manual.

CHECK LIST NO. 2

CHICO AND MUD CREEKS AND SANDY GULCH

LEVEES AND CHANNELS

Inspector's Report Sheet No. _____ Inspector _____

Date _____ Superintendent _____

Item	Remarks
(a) Location by Station	
(b) Settlement, sloughing, or loss of grade	
(c) Erosion of levee slopes	
(d) Condition of roadways, including ramps	
(e) Evidence of seepage	
(f) Condition of farm gates and fencing	
(g) Maintenance measures taken since last inspection	
(h) Comments	

INSTRUCTIONS FOR COMPLETING SHEET 2, EXHIBIT E
(To be printed on back of sheet 2)

- Item (a) Indicate levee station of observance, obtained by pacing from nearest reference point; indicate right or left bank.
- Item (b) If sufficient settlement of earthwork has taken place to be noticeable by visual observation, indicate amount of settlement in tenths of a foot. If sloughing has caused a change in slope of the embankment sections, determine the new slope, Note areas where erosion or gulying of the section has occurred.
- Item (c) If sufficient erosion or gulying of back face of back toe of levee has taken place to be noticeable by visual inspection, indicate area affected and depth.
- Item (d) Note any natural change in any section of roadway or ramps. Indicate any inadequacy in surface drainage system.
- Item (e) Indicate any evidence of seepage through the embankment section.
- Item (f) Indicate the serviceability of all farm gates across the embankments and roadway, and indicate if repainting is required.
- Item (g) Indicate maintenance measures that have been performed since last inspection and their condition at the time of this inspection.
- Item (h) Record opinion, if any, of contributory causes for conditions observed and also any observations not covered under other columns.

NOTE: One copy of the Inspector's Report is to be mailed to the District Engineer immediately on completion, and one copy is to be attached to and submitted with the Superintendent's semi-annual report.

CHECK LIST NO. 3

CHANNEL AND RIGHT-OF-WAY

CHICO AND MUD CREEKS AND SANDY GULCH

Inspector's Report Sheet No. _____ Inspector _____

Date _____ Superintendent _____

Item	Remarks
(a) Name of channel and location by stations	
(b) Vegetal growth in channel	
(c) Debris and refuse in channel	
(d) New construction within right-of-way	
(e) Extent of aggradation or degradation	
(f) Condition of riprapped section	
(g) Condition of bridges	
(h) Measures taken since last inspection	
(i) Comments	

INSTRUCTIONS FOR COMPLETING SHEET 4, EXHIBIT E
(To be printed on back of Sheet 4)

- Item (a) Indicate station of observation obtained by pacing from nearest reference point.
- Item (b) Note nature, extent, and size of vegetal growth within the limits of flood flow channel.
- Item (c) Note nature and extent of debris and refuse that might cause clogging of the conduits of the irrigation intake works, fouling of the tainter gates, or the bridges over the channel.
- Item (d) Report any construction along the diversion channel or above the diversion channel or above the diversion works that has come to the attention of the inspector and that might affect the functioning of the project.
- Item (e) Indicate any change in grade or alignment of the channels, either by deposition of sediment or scour, that is noticeable by visual inspection. Estimate amount and extent.
- Item (f) Indicate any change that has taken place in the riprap such as disintegration of the rock, erosion, or movement of the rock. Note the presence of vegetal growth through the riprap.
- Item (g) Note any damage or settlement of the footings of the bridges. Indicate condition of wooden structures and if repainting is required. Indicate condition of bridge approaches, headwalls, and other appurtenances.
- Item (h) Indicate maintenance measures that have been performed since the last inspection and their condition at time of this inspection.
- Item (i) Record opinion, if any, of contributory causes for conditions observed, also any observations not covered under other columns.

NOTE: One copy of the Inspector's Report is to be mailed to the District Engineer immediately on completion, and one copy is to be attached to and submitted with the Superintendent's semi-annual report.

SUGGESTED CHECK LIST NO. 4

DRAINAGE AND IRRIGATION STRUCTURES

CHICO, MUD & SANDY GULCH

Inspector's Report Sheet No. _____ Inspector _____

Date _____ Superintendent _____

(a)	(b)	(c)	(d)	(e)	(f)	(g)	(h)
Location by Levee Mile	Bank	Debris or other obstruction to flow	Damage or settlement of pipe or conduit	Condition of concrete headwall or invert paving	Condition of right-of-way adjacent to structure	Repair Measures taken since last inspection	Comments
0.26	Rt.						
1.03	"						
1.95	"						
3.11	"						
3.27	"						
3.48	"						
4.08	"						
4.58	"						
4.94	"						
5.22	"						
6.69	"						
7.01	"						
0.25	Lt.						
1.34	"						
1.55	"						
2.13	"						
2.44	"						

SUGGESTED CHECK LIST NO. 4

DRAINAGE AND IRRIGATION STRUCTURES

CHICO, MUD & SANDY GULCH

Inspector's Report Sheet No. _____

Inspector _____

Date _____

Superintendent _____

(a) Location by Levee Mile	2.86 3.64 4.77 5.83 6.30 6.35 6.65 7.17 7.46 8.09
(b) Bank	Lt. " " " " " " " " " "
(c) Debris or other obstruction to flow	
(d) Damage or settlement of pipe or conduit	Mud Creek (Cont'd)
(e) Condition of concrete headwall or invert paving	
(f) Condition of right-of-way adjacent to structure	
(g) Repair Measures taken since last inspection	
(h) Comments	

SUGGESTED CHECK LIST NO. 4

DRAINAGE AND IRRIGATION STRUCTURE

CHICO, MUD & SANDY GULCH

Inspector's Report Sheet No. _____

Inspector _____

Date _____

Superintendent _____

(a) Levee Mile	0.09 0.39 1.28 1.53 2.00 2.23 3.16 3.28 3.43 3.59 3.76 3.78								
(b) Bank	Rt. " " " " " " Lt. Rt. " " " " "								
(c) Debris or other obstruction to flow									
(d) Damage or settlement of pipe or conduit									
(e) Condition of concrete headwall or invert paving									
(f) Condition of right-of-way adjacent to structure									
(g) Repair Measures taken since last inspection									
(h) Comments									

SUGGESTED CHECK LIST NO. 4

DRAINAGE AND IRRIGATION STRUCTURES

CHICO, MUD & SANDY GULCH

Inspector's Report Sheet No. _____

Inspector _____

Date _____

Superintendent _____

(a) Location by Levee Mile	(b) Bank	(c) Debris or other obstruction to flow	(d) Damage or settlement of pipe or conduit	(e) Condition of concrete headwall or invert paving	(f) Condition of right-of-way adjacent to structure	(g) Repair measures taken since last inspection	(h) Comments
<u>Sycamore Creek (Cont'd)</u>							
0.28	Lt.						
0.34	"						
0.36	"						
0.66	Rt.						
0.74	Rt.						
0.96	Lt.						
0.98	"						
1.15	"						
1.41	"						
2.22	"						
2.56	"						

INSTRUCTIONS FOR COMPLETING SHEET 6, EXHIBIT E
(To be printed on back of Sheet 6)

- (1) Enter station of all structures under Column (a) for check list.
- (2) Inspect inlet, barrel, and outlet for accumulation of sediment, rubbish, and vegetal matter. Note condition under Column (c).
- (3) If any settlement or damage to the pipe, barrel, or invert of the drain has occurred, estimate the location and amount. Note particularly if any backfill has come into the pipe or been disturbed. Record observations under Column (d).
- (4) Inspect the concrete portions of the structures for evidence of settlement, cracks, "pop-outs", spaces, abrasive wear, or other deterioration. Record conditions under Column (e).
- (5) Inspect backfill area adjacent to structure for evidence of erosion caused by overflow of the drainage structure and note conditions in Column (f).
- (6) Under Column (g) indicate physical measures that have been taken to correct conditions reported in last inspection, and their condition at time of this inspection.
- (7) Under Column (h) record opinion, if any, of contributory causes for conditions observed, also any observations not covered under other columns.
- (8) A copy of the inspector's report is to be mailed to the District Engineer immediately on completion, and a record copy shall be attached to the Superintendent's semi-annual report.

EXHIBIT F

LETTER OF ACCEPTANCE BY THE STATE RECLAMATION BOARD

EXHIBIT F

C
O
P
Y

THE RECLAMATION BOARD
of the
STATE OF CALIFORNIA

C
O
P
Y

December 21, 1962

District Engineer
Sacramento District
Corps of Engineers
U. S. Army
P. O. Box 1739
Sacramento 8, California

Dear Sir:

Reference is made to your letter of November 27, 1962 concerning transfer to the State of California of channel improvement and levee construction work on Chico and Mud Creeks from Sacramento River to Sacramento Avenue which was constructed under Corps of Engineers Specification No. 2742.

The Reclamation Board at its meeting of December 20, 1962 formally accepted the above-referred-to levee work for operation and maintenance.

Sincerely yours,

/s/A. E. McCollam

A. E. McCOLLAM
General Manager

EXHIBIT F
Sheet 1 of 2

C
O
P
Y

THE RECLAMATION BOARD
of the
STATE OF CALIFORNIA

C
O
P
Y

April 22, 1965

Refer to: 7001.55.502
4130.55.502

District Engineer
Corps of Engineers
U. S. Army
650 Capitol Mall
Sacramento, California - 95814

Dear Sir:

Reference is made to your letter of 18 December 1964, concerning transfer to the State of California of channel improvement, levee construction and rock revetment on Mud Creek, Mud Creek extended, Sycamore Creek, Dry Creek, North Sycamore Creek, Sheep Hollow, Diversion Channel and Big Chico Creek, Lindo Channel and Big Chico Discharge Channel and the Channel Slough Plug on the right bank of Lindo Channel, in accordance with Specification No. 2882.

The Reclamation Board, at its meeting of January 7, 1965, formally accepted the above referred to work for operation and maintenance.

Sincerely yours,

/s/A. E. McCollam

A. E. McCOLLAM
General Manager

EXHIBIT F
Sheet 2 of 2

THE RECLAMATION BOARD
State of California

COPY

4 March 1966

Refer to: 4130.55.502

District Engineer
Corps of Engineers
U. S. Army
650 Capitol Mall
Sacramento, California 95814

Dear Sir:

Reference is made to your letter of February 21, 1966 concerning transfer to the State of California of Phase II of Project Modification of Chico and Mud Creeks and Sandy Gulch Flood Control Project, in accordance with Specification No. 3250A.

The Reclamation Board, at its meeting of March 3, 1966, formally accepted the above referred to work for operation and maintenance.

Sincerely yours,

/s/ A. E. McCOLLAM
A. E. McCOLLAM
General Manager

EXHIBIT F

SPKRD-F

21 February 1966



The Reclamation Board
State of California
1416 - 9th Street, Room 1335
Sacramento, California 95814

Gentlemen:

Reference is made to the joint inspection of 14 February 1966, on the Project Modifications to Chico & Mud Creeks and the Sandy Gulch Project. The first portion of this project was transferred to your agency on 30 November 1965. The completed works are a part of the Sacramento River Major & Minor Tributaries Flood Control Project, which was authorized by the Flood Control Act of 22 December 1944 (Public Law 534, 78th Congress, 2nd Session, and Section 2304(a), Title 10 U.S.C.A.), and were inspected for the purpose of transferring them to the State of California for operation and maintenance.

The final portion of the completed work consists of the slidegates on Lindo & Big Chico Structures, the link fence in Lindo Channel, and the tie-in fences. The work was accomplished as shown on Drawing No. 50-4-4085, and was completed on 14 February 1966, in accordance with Specification No. 3250A and Contract No. DA-04-167-CIVENG-66-37.

The above flood control work, together with the work transferred to your agency on 30 November 1965, completes the Project Modifications to Chico & Mud Creeks and the Sandy Gulch Project. Therefore, said flood control work is hereby transferred to the State of California for operations and maintenance.

This portion of the project work will be added by amendment to the Operation & Maintenance Manual, which will be furnished your office at a later date.

Sincerely yours,

ROBERT E. MATHE
Colonel, CE
District Engineer

CERTIFIED MAIL
RETURN RECEIPT REQUESTED

Copy furnished:
Dept Water Resources
O.C.E. & S.P.D.

cc: Engr Div-Lev & Chan; Engr Div-Prog Dev; Valley Res; F&A(Cordano)

Morgan
MORGAN/pp

Coleman
COLEMAN

Henson
HENSON

Hart
HART

Mathe
MATHE
an

V013

OPERATIONS BRANCH
FLOOD CONTROL SECTION

THE RECLAMATION BOARD
State of California

12 January 1966

Refer to: 7001.55.502
4130.55.502

District Engineer
Corps of Engineers
U. S. Army
650 Capitol Mall
Sacramento, California

Dear Sir:

Reference is made to your letter of November 30, 1965 concerning transfer to the State of California of Phase I, Chico, Mud and Sandy Gulch Project Modification, in accordance with Specification No. 3250A.

The Reclamation Board, at its meeting of January 6, 1966, formally accepted the above referred to work for operation and maintenance.

Phase II of the above referred to project has not been completed as yet. This portion will be transferred at a later date after completion.

Sincerely yours,

/s/ A. E. McCOLLAM
A. E. McCOLLAM
General Manager

COPY

EXHIBIT F

30 November 1965

The Reclamation Board
State of California
1416 - 9th Street, Room 1335
Sacramento, California 95814

Gentlemen:

Reference is made to the joint inspection of 19 November 1965, of the Project Modifications to Chico and Mud Creeks and the Sandy Gulch Unit previously transferred to your agency on 18 December 1964. The modified items are part of the Sacramento River Major and Minor Tributaries Flood Control Project and were inspected for the purpose of transferring them to the State of California for operation and maintenance.

The completed work consists of rock revetment, low water crossings, drainage ditches, weir, fences, revisions to existing diversion structures and concrete sills, located in Mud Creek, Sycamore Creek, Diversion Channel, Big Chico Creek, Lindo Creek, Big Chico Discharge Channel, Sheep Hollow and Dry Creek. The work was accomplished as shown on Drawing No. 50-4-4085, with the exception of the slide gates on Lindo and Big Chico structures, the link fence in Lindo Channel and the tie-in fences, was completed on 19 November 1965, in accordance with Specification No. 3250A and Contract No. DA-04-167-CIVENG-66-37.

This work was performed under the general authority of the Sacramento River Major and Minor Tributaries Flood Control Project, which was authorized by the Flood Control Act of 22 December 1944 (Public Law 534, 78th Congress, 2d Session; and Section 2304(a), Title 10, U.S.C.A.).

The above flood control work, with the exception of the remaining portion scheduled to be completed by 20 May 1966, now meets the requirements of the Sacramento River Major and Minor Tributaries Flood Control Project. Therefore, said flood control work is hereby transferred to the State of California for operation and maintenance.

✓
CERTIFIED MAIL
RETURN RECEIPT REQUESTED

Vol 3

SPWKO-F
The Reclamation Board

30 November 1965

This portion of the project work will be added by amendment to the Operation and Maintenance Manual, and furnished your office at a later date.

Sincerely yours,

ROBERT E. MATHE
Colonel, CE
District Engineer

CHARLIE E. CLUCK
Senior, CE
Deputy District Engineer

Copy furnished:
Dept Water Resources

O.C.E.
S.P.D.

cc: Engr-Lev & Chan
Engr-Prog Dev
Valley Res Ofc
F&A (Cordano)

Km
MORGAN/PP

[Signature]
COLEMAN

HENSON

[Signature]
HAY
[Signature]
MATHE

Vol 3

h

[Signature]

SPKIO-F

18 DEC 1964

CO
Open

The Reclamation Board
State of California
1416 - 9th Street, Room 1335
Sacramento, California 95814

Gentlemen:

Reference is made to the joint inspection made 30 November 1964, on the flood control project work on Chico and Mud Creek, and the Sandy Gulch Unit. This portion of work is part of the Sacramento River Major and Minor Tributaries Flood Control Project and was inspected for the purpose of transferring, upon completion, the remaining portion of the project to the State of California for operation and maintenance.

The work consists of channel improvement, levee construction and rock revetment on Mud Creek, Mud Creek extended, Sycamore Creek, Dry Creek, North Sycamore Creek, Sheep Hollow, Diversion Channel and Big Chico Creek, Lindo Channel and Big Chico Discharge Channel and the Channel Slough Plug on the right bank of Lindo Channel, starting from U. S. 99 and running eastward. The work as shown on the attached tabulation, was completed on 16 December 1964, in accordance with Specification No. 2882, Contract No. DA-04-167-CIVENG-64-6, and Drawing No. 50-4-3685.

This work was performed under the general authority of the Sacramento River Major and Minor Tributaries Flood Control Project, which was authorized by the Flood Control Act of 22 December 1944 (Public Law 534, 78th Congress, 2d Session).

The above flood control work now meets the requirements of the Sacramento River Major and Minor Tributaries Flood Control Project. Therefore, said flood control work is hereby transferred to the State of California for operation and maintenance.

The maintenance work required under the provisions of the Sacramento River and Major and Minor Tributaries Flood Control Project shall be performed in accordance with existing Flood Control Regulations, inclosed herewith, which have been prescribed by the Secretary of the

Vol 13

SPKHO-7
The Reclamation Board

18 DEC 1964

Army pursuant to Section 3 of the Act of Congress, approved 22 June 1936. As provided under paragraph 208.10(10) of these regulations, an Operation and Maintenance Manual covering the work is in process of preparation and will be furnished to you upon completion.

Sincerely yours,

- 2 Incls
1. Tabulation (in 2 shte)
2. F.C. Regs.

ROBERT E. MATHE
Colonel, CE
District Engineer
CHARLIE E. CLUCK
Major, CE
Deputy District Engineer

Copy furnished:
Dept Water Resources
23rd & "R" Streets
Sacramento, California
O.C.E.
S.P.D.

cc: Engr Div-Lev & Chan w/Incl 1
Engr Div-Prog Dev Br w/Incl 1
Finance & Acctg Br w/o Incl (C. Cordano)
Valley Area Ofc w/Incl 1

~~KELSTON~~
COLEMAN/PP

THOMPSON

HART *em*

hm
MATHE

SUMMARY OF CONSTRUCTED WORK
CHICO AND MUD CREEKS & SANDY GULCH

LEVEE CONSTRUCTION AND ROAD SURFACING

<u>RIGHT BANK</u>			<u>MUD CREEK</u>		
<u>Sta to Sta</u>	<u>Length (ft)</u>		<u>LEFT BANK</u>		<u>Length -(ft)</u>
347+82	359+47	1,165	347+15	357+93	1,078
<u>MUD CREEK EXTENDED</u>					
0+00	79+50	7,950	0+00	8+13	813
79+50	95+85	1,635*	7+35	67+29	5,994
<u>SYCAMORE CREEK</u>					
369+58	400+04	3,046	357+93	396+63	3,870
400+40	448+43	4,839	396+99	460+90	6,391
454+93	464+12	919			
<u>SHEEP HOLLOW</u>					
0+00	31+60	3,160	0+00	47+05	4,705
<u>NORTH SYCAMORE CREEK</u>					
0+00	8+81	881	0	0	0
<u>DRY CREEK</u>					
0+00	3+20	320	0+00	3+50	350
3+50	13+38	988	3+75	15+51	1,176
<u>DIVERSION CHANNEL</u>					
0	0	0	580+45	610+00	2,955*
			610+00	639+90	2,990
			639+90	644+95	505*
			644+95	652+50	755
<u>BIG CHICO CREEK</u>					
0	0	0	669+16	678+23	907
<u>LINDO CHANNEL</u>					
0	0	0	654+32	667+72	1,340

*Patrol Road Only

Vol 3

SUMMARY OF UNITS CONSTRUCTED
CHICO & MUD CREEKS AND SANDY GULCH

CHANNEL IMPROVEMENTS

		<u>LINEAL FEET</u>
Mud Creek	Sta 347+75 to Sta 359+29 Rock Revetment Both Banks	1,154 555
Mud Creek Extended	Sta 0+00 to Sta 8+00 Sta 74+40 to Sta 98+48 Rock Revetment Right Bank	800 2,408 500
Sycamore Creek	Sta 359+29 to Sta 514+70 Rock Revetment Both Banks	15,541 5,220
Dry Creek	Sta 0+00 to Sta 24+76	2,476
North Sycamore Creek	Sta 0+00 to Sta 31+46	3,146
Sheep Hollow	Sta 0+00 to Sta 52+20 Rock Revetment Right Bank	5,220 500
Diversion Channel and Big Chico Creek	Sta 579+80 to Sta 684+10	6,830
Lindo Channel and Big Chico Discharge Channel		800

Vol 3

Open

SPKCO-F

18 November 1964

The Reclamation Board
State of California
1416 - 9th Street, Room 1335
Sacramento, California 95814

Gentlemen:

Reference is made to the joint inspection made on 12 November 1964, of flood control work on Chico and Mud Creeks, and the Sandy Gulch Unit of the Sacramento River and Major and Minor Tributaries Flood Control Project, for the purpose of transferring a portion of it, upon completion, to the State of California for operation and maintenance.

The work, being a portion of the above project, consists of channel improvement, levee construction and rock revetment on Mud Creek, Channel Slough and S.P.R.R. Tie levee, starting from Sacramento Avenue and running continuously to U.S. Highway 99E. This work as shown on the attached tabulation, was completed on 12 November 1964, in accordance with Specification No. 2882, Contract No. DA-04-167-CIVENG-64-6, and Drawing No. 50-4-3685.

The above flood control work now meets the requirements of the Sacramento River and Major and Minor Tributaries Flood Control Project. Therefore, said flood control work is hereby transferred to the State of California for operation and maintenance.


The maintenance work required under the provisions of the Sacramento River and Major and Minor Tributaries Flood Control Project shall be performed in accordance with existing Flood Control Regulations, inclosed herewith, which have been prescribed by the Secretary of the Army pursuant to Section 3 of the Act of Congress, approved 22 June 1936. As provided under paragraph 206.10(10) of these regulations, an

V613

CERTIFIED MAIL
RETURN RECEIPT REQUESTED

SPKCO-F
The Reclamation Board

18 November 1954



Operation and Maintenance Manual covering the work under this portion of the project is in process of preparation and will be furnished to you upon completion.

Sincerely yours,

- ~~2 Incl~~
- 1. Tabulation
- 2. F.C. Reg.

ROBERT E. MATHE
Colonel, CE
District Engineer

~~Copy furnished:~~
Dept Water Resources
23rd & "R" Streets
Sacramento, Calif.

O.C.E.
S.P.D.

- ~~cc:~~ Engr Div-Lev & Chan w/Incl 1
- Engr Div-Prog Dev Br w/Incl 1
- Finance & Acctg Br w/o Incl
- Valley Area Ofc w/Incl 1

John
COLEMAN/pmp

ms
THOMPSON

[Signature]
HAY

[Signature]
MATHE

Vol 3

an

**SUMMARY OF CONSTRUCTED WORK
MUD CREEK, CHANNEL SLOUGH & SPRR TIE LEVEE**

MUD CREEK
LEVEE CONSTRUCTION AND ROAD SURFACING

<u>RIGHT BANK</u>			<u>LEFT BANK</u>		
<u>Sta to</u>	<u>Sta</u>	<u>Length (ft)</u>	<u>Sta to</u>	<u>Sta</u>	<u>Length (ft)</u>
90+44	91+20	76	90+03	92+48	245
91+54	182+60	9,082	92+84	112+30	1,946
187+73	204+14	2,141	112+93	180+14	6,721
204+54	221+98	1,744	180+49	205+56	2,507
222+10	237+58	1,548	206+00	212+00	600
237+74	313+60	7,586	215+20	222+25	705
314+05	347+42	3,337	222+50	239+15	1,665
			239+47	316+80	7,733
			317+19	346+75	2,956

CHANNEL SLOUGH
LEVEE CONSTRUCTION AND ROAD SURFACING

0	0+00	13+57	1,357
---	------	-------	-------

SPRR TIE LEVEE
LEVEE CONSTRUCTION AND ROAD SURFACING

0	0+00	11+60	1,160
---	------	-------	-------

MUD CREEK
CHANNEL IMPROVEMENTS

<u>Sta to</u>	<u>Sta</u>	<u>Length (ft)</u>	<u>Rock Revetment</u>	<u>Length(ft)</u>
80+00	347+75	26,775	Both Banks (intermittent)	19,295

CHANNEL SLOUGH
CHANNEL IMPROVEMENTS

105+00	108+99	399	Left Bank (intermittent)	65
0+00	16+30	1,630		

SPRR TIE LEVEE
CHANNEL IMPROVEMENTS

0+00	18+50	1,850	Left Bank (intermittent)	50
------	-------	-------	-----------------------------	----

10/13

SPKKO-C

27 November 1962

The Reclamation Board
State of California
1215 "O" Street
Sacramento 14, California

Gentlemen:

Reference is made to the joint inspection made on 23 November 1962, of flood control work on the lower reach of the Chico and Mud Creek and Sandy Gulch unit of the Sacramento River and Major and Minor Tributaries Flood Control Project, for the purpose of transferring it, upon completion, to the State of California for operation and maintenance.

The work, consisting of channel improvement and levee construction on Chico and Mud Creeks from Sacramento River to Sacramento Avenue, was completed on 26 November 1962 in accordance with Specification No. 2742, Contract No. DA-04-167-GIVING-62-64 and Drawing No. 50-4-3684.

The flood control work described above now meets the requirements of the Sacramento River and Major and Minor Tributaries Flood Control Project. Therefore, said flood control work together with the waterway banks contiguous thereto, are hereby transferred to the State of California for operation and maintenance.

The maintenance work required under the provisions of the Sacramento River and Major and Minor Tributaries Flood Control Project shall be performed in accordance with existing Flood Control regulations, inclosed herewith, which have been prescribed by the Secretary of the Army pursuant to Section 3 of the Act of Congress, approved 22 June 1936. As provided under Paragraph 208.10(10) of these regulations, an Operation and Maintenance Manual covering the work under this portion of the project is in process of preparation and will be furnished to you upon completion.

V613

REGISTERED
RETURN RECEIPT REQUESTED

SPKRO-C
The Reclamation Board

27 November 1962

A copy of this letter is being transmitted to the State Department
of Water Resources.

Sincerely yours,

✓ Incl
P.C. Reg.

H. N. TURNER
Colonel, CE
District Engineer

✓ Copy furnished:
Dept Water Resources
23rd & "R" Streets
Sacramento, Calif.

O.C.E. w/o incl
S.P.D. w/o incl

✓ cc: Engr Div-Lev & Chan w/o incl
Engr Div-Prog Dev Br w/o incl
Fin & Acctg Br w/o incl
Northern Area Ofc w/o incl

OPERATIONS BRANCH
CHANNELS & LEVEES SECTION

LHK
KRISTOF/pnp

THOMPSON

FOUR
JOHNSON

TURNER

Vol 3

102

EXHIBIT G

SAMPLE PERMIT

for use of

RIGHT-OF-ENTRY

EXHIBIT G

EXHIBIT G

PERMIT

(Name of Levee Commission or City)

(Location)

Permission is hereby granted to:

(Name of Firm or Individual)

(Address)

TO: (Describe in these spaces the proposal, including kind and type of construction, purpose intended, location by stationing. Indicate passage-way provided by means of gates, etc. Use separate sheets if necessary, identifying each by reference herein.)

Provided that:

Upon termination or expiration of this permit (whether by voluntary relinquishment by the grantee, by revocation by the grantor or otherwise) the grantee shall remove all structures, improvements, or appurtenances which may have been erected or constructed under this permit, and shall repair or replace any portion of the flood protection structure or right-of-way which may have been damaged by his operations (including grading and seeding, or sodding, if necessary), to the satisfaction of the grantor.

The structure or operation for which this permit is issued shall be maintained by the grantee in such manner as shall not injure or damage the flood protection structure, or interfere with its operation and maintenance in accordance with regulations of the Secretary of the Army.

The structure or operation covered by this permit may be damaged, removed or destroyed by the grantor in time of flood emergency if such action is determined by the grantor to be necessary in order to preserve life or property or prevent damage or impairment to the use of safety of the flood protection structure, and the grantor shall not be liable to the grantee for such damage or destruction.

Unless otherwise specifically provided herein, this permit may be cancelled at anytime by the grantor upon 10 days written notice mailed to the address shown above. During such 10-day period, (or such other period as may be provided herein), the grantee will be permitted to remove any property or improvements installed under this permit, and to repair or replace any damage to the flood protection right-of-way or structures resulting from his use or operations. At the end of such period, the grantor shall have the right to possess and dispose of any such property or improvements remaining upon its right-of-way, and may proceed to repair or replace any such damage, and the grantee herein shall be liable to the grantor for the full cost of such repairs or replacements.

The construction, installation and maintenance of the structure or structures covered by this permit shall be subject to inspection by representatives of the grantor and the United States at all reasonable times.

In the event the work covered by this permit consists of or includes major construction, the cost of inspection thereof by the grantor and/or the United States shall be paid by the applicant.

Grantee agrees that it will not use the area or facilities covered by this permit, or permit such area to be used, for any purpose other than is specifically covered by this permit.

(Use these spaces for special conditions applicable to this permit.)

THIS PERMIT SHALL NOT BE VALID UNTIL APPROVED BY THE DISTRICT ENGINEER OF THE U. S. ARMY ENGINEER DISTRICT, SACRAMENTO, OR HIS AUTHORIZED REPRESENTATIVE.

	<u>Signature (Grantor)</u>	<u>(Title)</u>	<u>(Date)</u>
Terms of this permit are hereby accepted	Approved:		
<u>Signature (Grantee)</u>	<u>(Date)</u>	<u>(Date)</u>	

District Engineer

REGULATIONS GOVERNING ISSUANCE OF PERMITS FOR USE OF
RIGHTS-OF-WAY FOR FLOOD PROTECTION PROJECTS

As the flood protection works and rights-of-way are owned by the Local Interests and will be operated and maintained by them in accordance with the Regulations of the Secretary of the Army, and issuance of any permits to use the restriction that no such permits may be issued without the approval of the District Engineer, as stated in Paragraph No. 208.10 (a) General, (5) of the Regulations, a copy of which is attached hereto.

Applications for use of the rights-of-way should be addressed to the City or Levee Commission having jurisdiction over the local flood protection project. The City or Levee Commission will then forward the application to the District Engineer, of the U. S. Army Engineer District, Sacramento, California, with its recommendation, with reasons for such recommendation. It is suggested that the application and recommendations be forwarded with a draft copy of the permit, in order that all objectionable features may be eliminated prior to its proffer to the applicant as this may prevent misunderstandings and arguments. If for any reason it is desired to forward the permit itself without this intervening step, five copies of the proposed permit should be included on which is stated the exact use of the rights-of-way, for which permission is being requested, together with any condition or restriction of the permit. The permit should be signed by the applicant and an official of the Local Interests. A drawing, sketch or detail plans as may be required to show the exact location, nature of work and proposed method of construction should be attached to each copy of the permit. If the permit is approved by the District Engineer, three copies will be returned. This will enable each party concerned to have a copy of the approved permit.

In any case where a permit is requested for any purpose which might cause disfigurement or damage to the flood protection rights-of-way or structure in its erection, use, or removal, it is suggested that the applicant be required to post a bond of sufficient amount to protect the Local Interests from any cost of repair or removal, and to guarantee faithful performance of the permit conditions. In such cases the permit should state the amount and conditions of the bond.

In cases involving major construction or other work which may directly affect the flood protection structure, it will be necessary that the United States inspect the work and the Local Interests may also desire to inspect it. As stated in the permit form, such inspection will be at the expense of the grantee, and this should be called to his attention. Except in cases of known financial security, arrangements should be made with the grantee for an advance deposit or bond to cover such costs.

There is attached hereto a copy of a permit form which has been successfully used by a number of cities and levee committees.